



Mounting details

EDA and CUSH
mounting

EDA mount

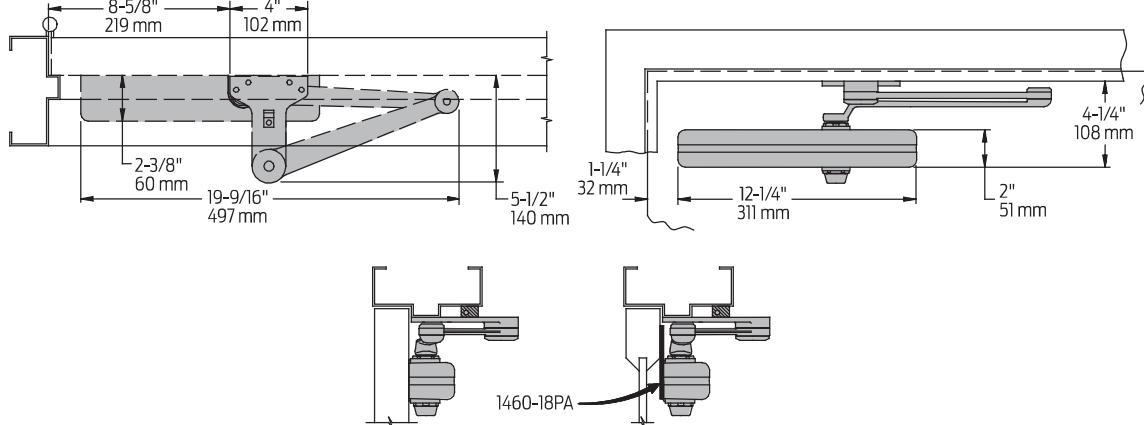

CUSH mount

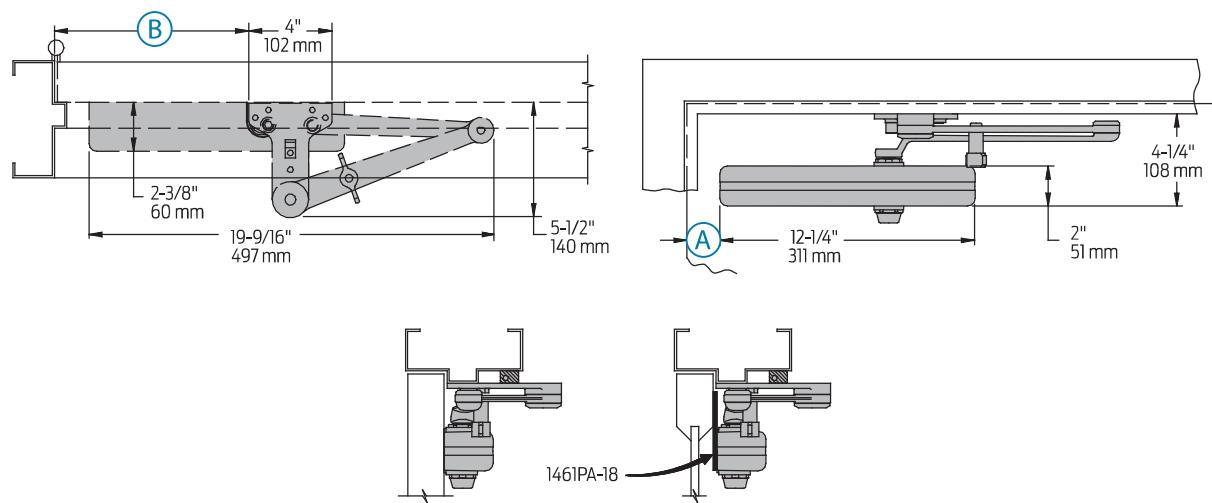

Spring CUSH

Hold open points are approximately 5° less than dead stop point

Clearance

1460-62EDA or CUSH shoe projects 5-1/2" (140 mm) from door face

Head Frame

Flush or rabbeted requires PA FLUSH PANEL ADAPTER, 1460-419

EDA or CUSH ARM

Requires SHOE SUPPORT, 1460-30 for fifth screw anchorage where reveal is less than 3-1/16" (78 mm)

Maximum opening

EDA template allows 110°
Hold-open point up to maximum opening

CUSH arms can be templated for
maximum opening/hold-open point at

85°: A = 2-3/8" (60 mm)
B = 9-9/16" (243 mm)

90°: A = 1-5/8" (41 mm)
B = 9-1/16" (230 mm)

100°: A = 5/8" (16 mm)
B = 8-1/16" (205 mm)

Note:

• 1460 closers ordered with EDA, CUSH or SPRING CUSH arms include 1460-201 FIFTH HOLE SPACER to support the shoe