
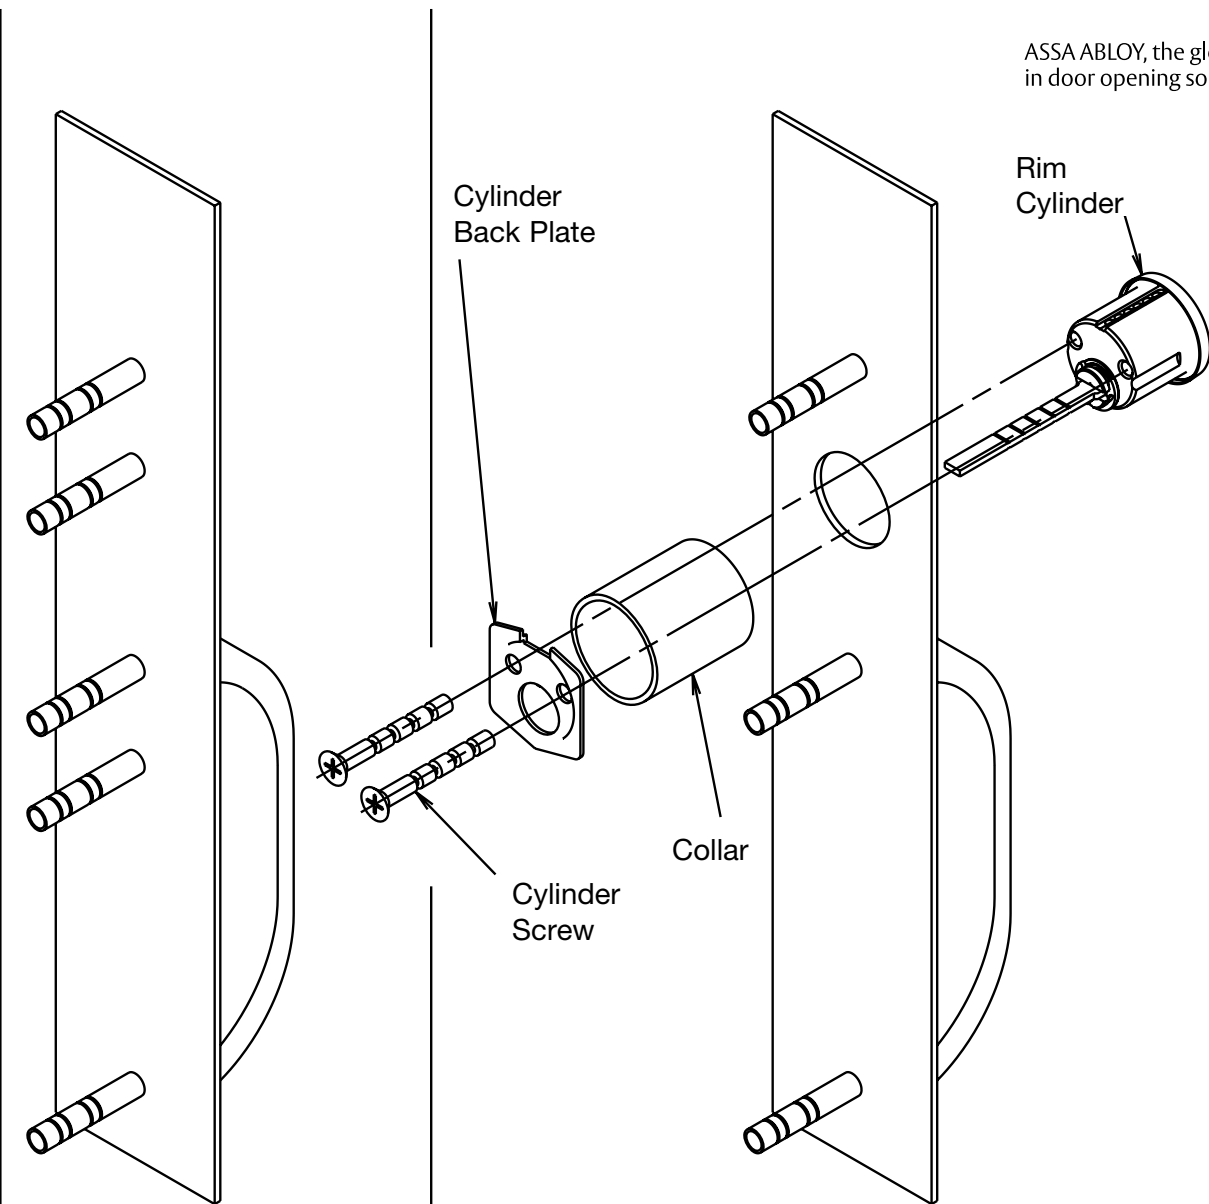


20 & 30 SERIES EXIT DEVICE INSTRUCTIONS FOR
APPLYING THE SARGENT THUMBPIECE OUTSIDE TRIM

SARGENT®

ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

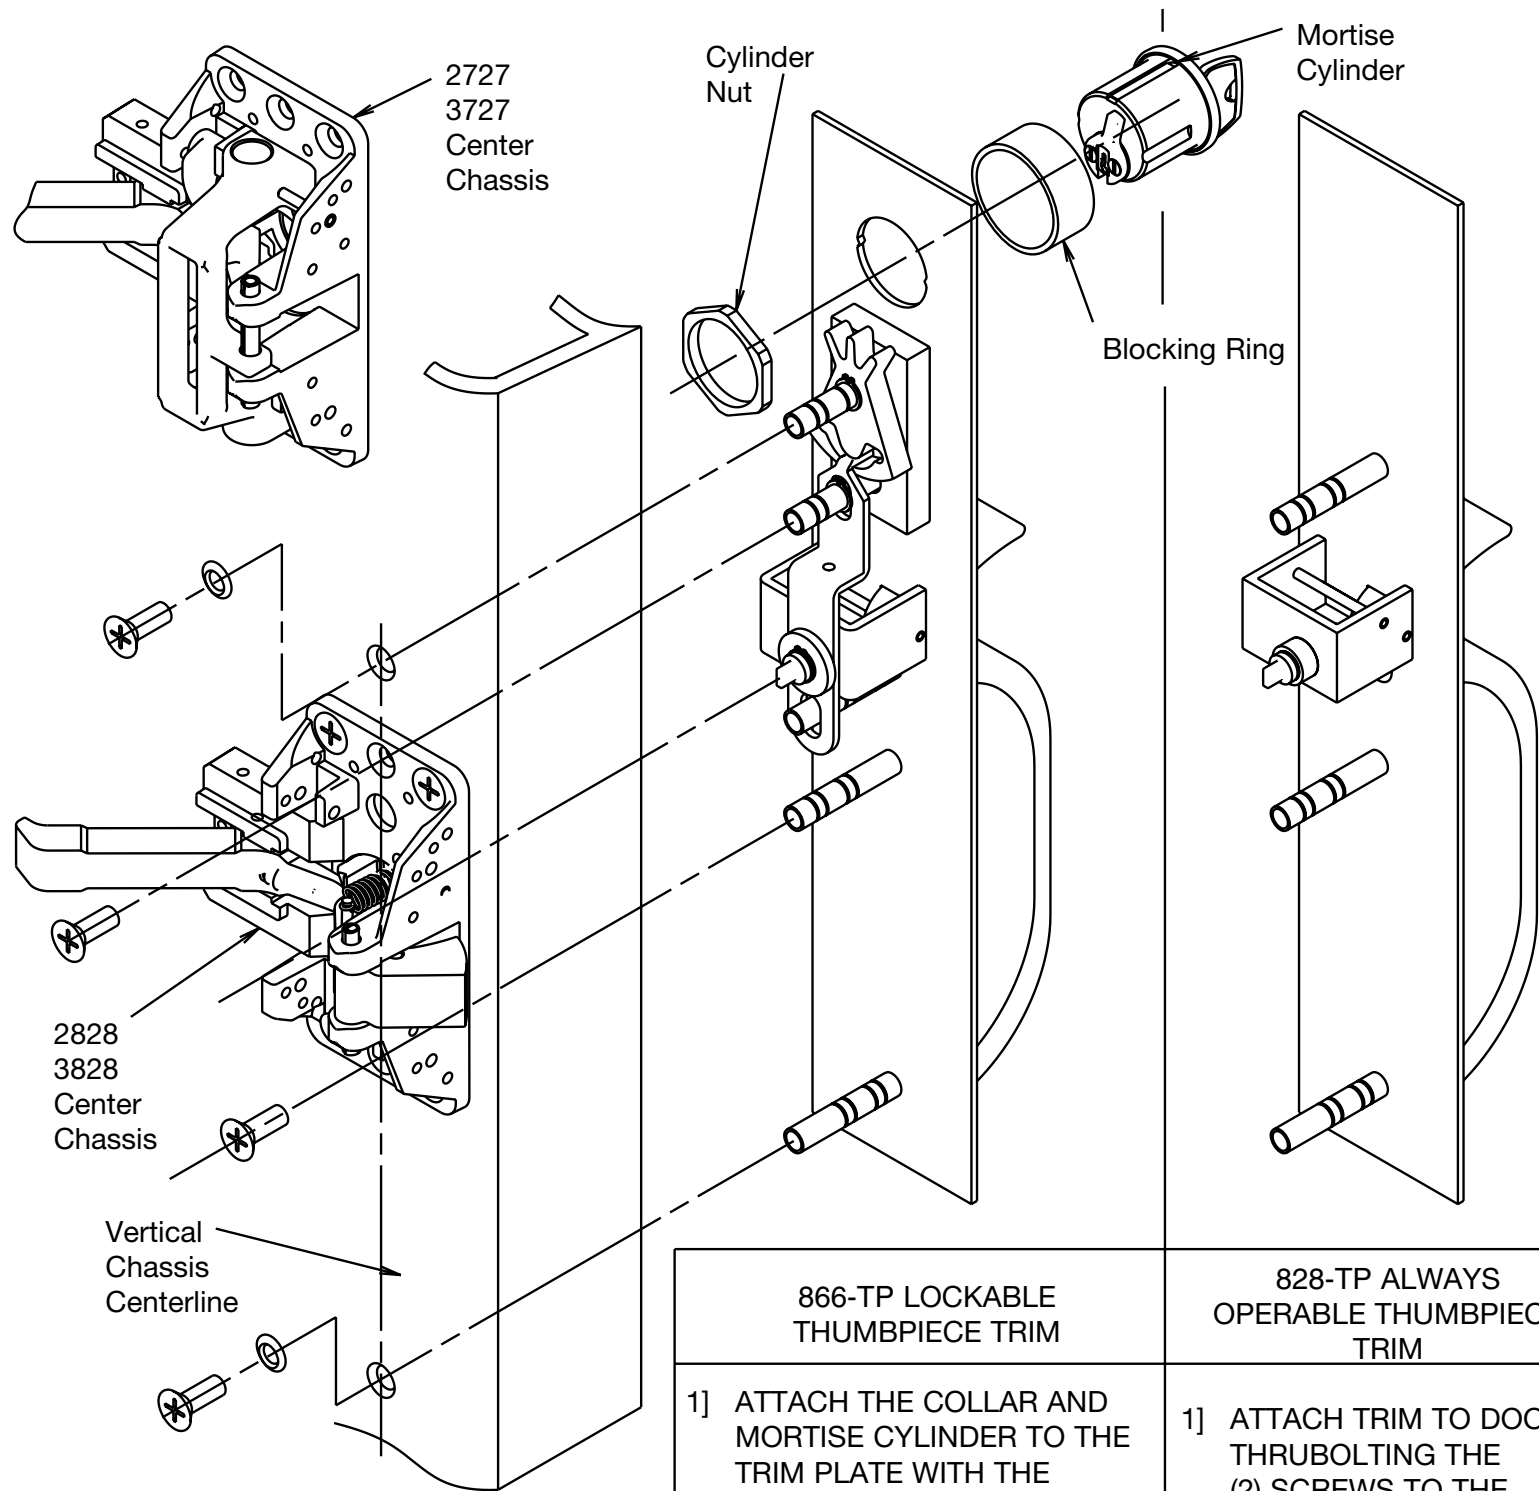

- NOTE:
- 1] FOR USE WITH SARGENT 20 & 30 SERIES EXIT DEVICES.
 - 2] TRIM IS NON-HANDED.
 - 3] FOR USE WITH 1 3/4" THICK DOORS ONLY.
 - 4] FOR USE WITH SARGENT, ASSA V10, AND BEST CYLINDERS ONLY.

866-TP LOCKABLE THUMBPIECE TRIM	828-TP ALWAYS OPERABLE THUMBPIECE TRIM	810-TP DUMMY THUMBPIECE TRIM	814-TP CYLINDER THUMBPIECE TRIM
1] ATTACH THE COLLAR AND MORTISE CYLINDER TO THE TRIM PLATE WITH THE MORTISE NUT. 2] ATTACH TRIM TO DOOR THRUBOLTING (2) SCREWS TO THE CHASSIS & THE (2) CUP WASHERS AND SCREWS AT THE TOP & BOTTOM TO THE DOOR.	1] ATTACH TRIM TO DOOR THRUBOLTING THE (2) SCREWS TO THE CHASSIS & (1) CUP WASHER AND SCREW AT THE BOTTOM TO THE DOOR.	1] ATTACH TRIM TO DOOR THRUBOLTING THE (2) SCREWS TO THE CHASSIS & (1) CUP WASHER AND SCREW AT THE BOTTOM TO THE DOOR.	1] ATTACH COLLAR, BACKPLATE AND RIM CYLINDER TO THE TRIM PLATE WITH THE (2) CYLINDER SCREWS. 2] ATTACH TRIM TO DOOR THRUBOLTING THE (2) SCREWS TO THE CHASSIS & THE (1) CUP WASHER AND SCREW AT THE BOTTOM TO THE DOOR.