


# INSTRUCTIONS FOR CHANGING FROM CONSTRUCTION KEY SYSTEM TO STANDARD KEY OPERATION

For installation assistance call SARGENT at 1-800-727-5477 • [www.sargentlock.com](http://www.sargentlock.com)

1. Insert and slide extractor into LOWER PART of key slot until stopped by half key. (Fig. 1)
2. Raise extractor slightly and hook over end of half key. (Fig. 2)

3. Pull out half key to clear cylinder barrel for standard key use. (Fig. 3)

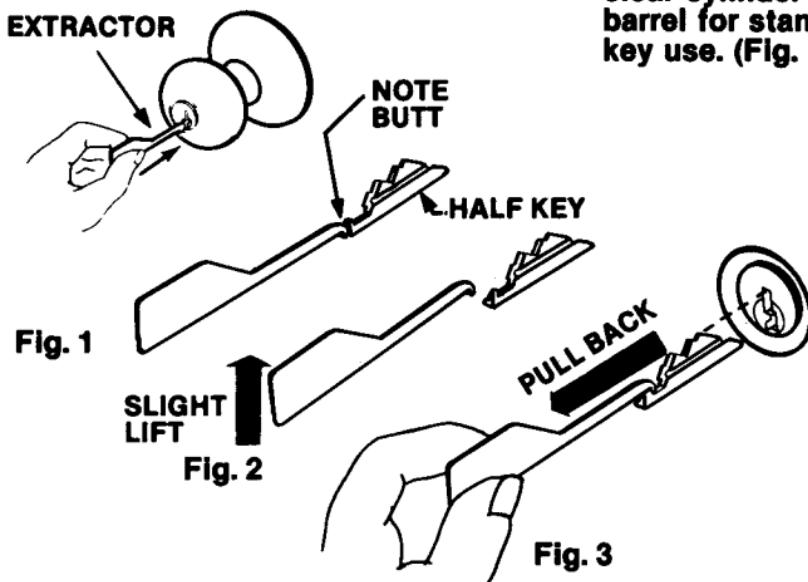

**SARGENT**

**ASSA ABLOY**

ASSA ABLOY, the global leader  
in door opening solutions

Copyright © 2009, Sargent Manufacturing Company, an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Sargent Manufacturing Company is prohibited.

**A5470D**