


# M Series

## Specifications

### Dimensions

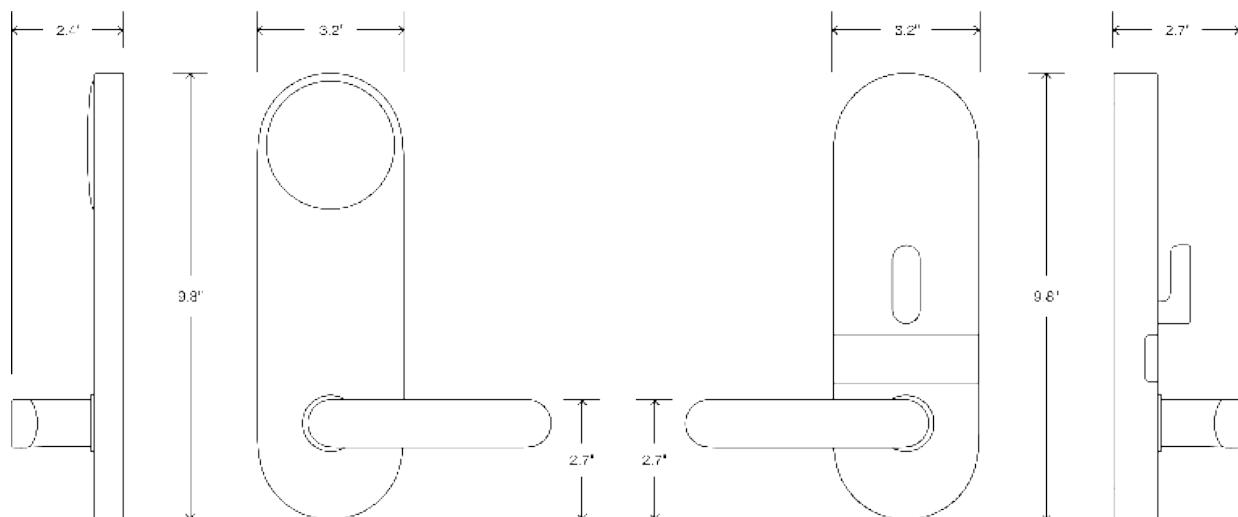

### Finishes




Silver

Black

Gold

### Lever Styles



## Features

---

Credential Types	Smartphone, NFC Card, Doorcode, Mechanical Key
Users	200
Camera	135° image capture
Management	App and Cloud

## Communication

---

Wireless Standards	Bluetooth Low Energy (BLE), Near Field Communication (NFC)
NFC Frequency	13.56 MHz
NFC Read Range	1.18
NFC Type	MiFare Classic
Supported Smartphones	iOS and Android (see website for full list)
Interface	Mobile apps, touchpad, NFC, and web

## Power

---

Power Supply	6 AA non-rechargeable alkaline batteries Wired power
Battery Life	12 months with normal usage
Battery Status	Monitoring and notifications in Latch software suite
Power Type	Class 2 isolated, UL listed DC power supply
Supply Voltage	12VDC
Power	2.4W

## Environmental

---

Operating Temperature	Exterior: -30°C to 70°C, Interior: -20°C to 54°C, Camera: 0°C to 60°C
Operating Humidity	0–95% relative humidity, non-condensing

## Certifications, Compliance, and Warranty

---

Certifications	UL 10C (90 min), FCC Part 15, IC RSS, built to ANSI/BHMA 156.13 Series 1000 Grade 1
Compliance	Complies with American Disabilities Act
Warranty	1-year limited warranty on electronic components, 5-year limited warranty on mechanical components

## Mechanical Specifications

---

Chassis	Mortise deadbolt
Handing	Field reversible
Door Thickness Compatibility	1-3/4"
Backset Compatibility	2-3/4"

## Mechanical Specifications

---

<b>Lever Style Options</b>	Standard and Return
<b>Latchbolt Throw</b>	3/4"
<b>Deadbolt Throw</b>	1"
<b>Strike Plate</b>	1-1/4" x 4-7/8", 1-1/4" lip
<b>Cylinder</b>	Schlage Type C keyway standard, with custom and specific cylinders available on request