


DOUBLE DOOR APPLICATIONS ONLY

LINES "Y-Y"
CORRESPOND TO
"Y-Y" ON DEVICE
AND TRIM TEMPLATES

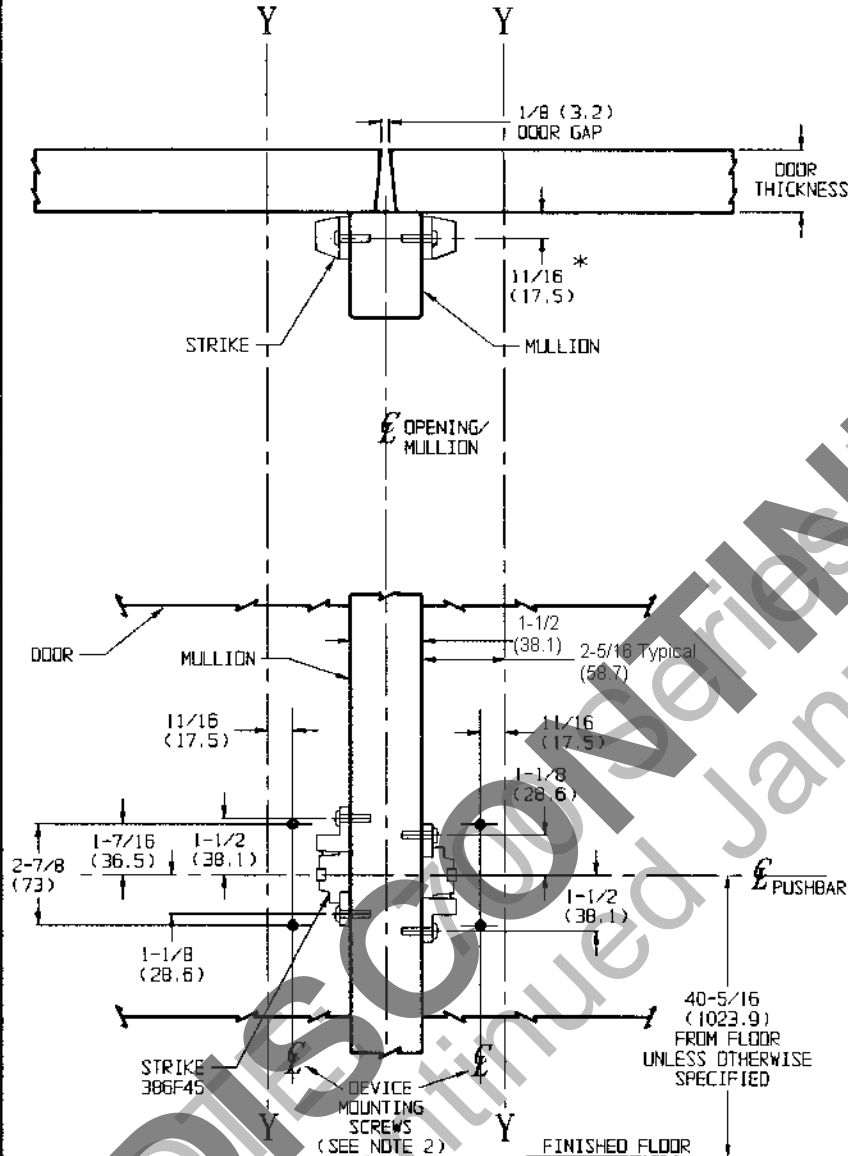

NOTES:

1. FOR 707A (KM), 708A (KM) AND 710 (KM) MULLION FRAME PREPARATION TEMPLATE, REFER TO T30882.
2. FOR OTHER DEVICE AND STRIKE MOUNTING SPECIFICATIONS, REFER TO APPROPRIATE SINGLE DOOR APPLICATION TEMPLATE.
- * 3. **CAUTION:** WHEN GLASS BEAD SHIMS ARE USED TO RAISE DEVICE OFF SURFACE OF DOOR, REFER TO GLASS BEAD SHIM TEMPLATE T30494 FOR PROPER STRIKE MOUNTING DIMENSIONS.
4. FOR PREPARATION OF TRIM, REFER TO SEPARATE TEMPLATE.
5. DIMENSIONS GIVEN IN INCHES AND (MM).

TEMPLATE CROSS REFERENCE (FOR SINGLE DOOR APPLICATIONS)

DESCRIPTION	TEMPLATE
ED8200 SERIES RIM DEVICE	T30436
ED8200 SERIES x M61 & M62	T30491

RECOMMENDED MINIMUM STILE

STILE	DESCRIPTION
5-1/4 (133.4)	ED8200 SERIES
5-1/2 (139.7)	ED8200 SERIES x M61 & M62

ED8200 Series
Rim Panic Exit Devices
Application to Metal, Wood, or Composite Doors
With 707A (KM), 708A (KM), or 710 (KM) Mullion

**Corbin
Russwin**
www.corbinrusswin.com

SUPERSEDES

Template Number

Do Not Scale Drawing

T30942

Date

9/99