



GAP90™ AND GAP90DKB™

Fire Door Head/Jamb Gap Solutions—Up To 90 Minutes

PRODUCT CUT SHEET

UL Certified for Head/Jamb Gaps
— Measuring over $\frac{1}{8}$ ", and up to $\frac{5}{16}$ ".



- 90-Minute Rated — for use on UL10B and UL10C Wood or Hollow Metal Fire Doors
 - Restricts the Passage of Smoke
 - Non-Handed
 - Available in 36", 48", 84" and 96" Lengths
-
- ❶ An NGP Strike Shim (9275 or 9225) may also be required for Proper Latchbolt Engagement
 - ❷ A Mounting Bracket (600D-28) is recommended when using Parallel Arm Closers

GAP90™

Requires installation of ALL components:

9945, 9400, 5075CL


GAP90DKB™

Requires installation of ALL components:

9945, 9400DKB, 5075B

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

9945 Steel Stop Extender



- 16-Gauge, Gray Primer Finish
- Furnished with #10 X 1" TEK SMS
- Patent No.: US9,273,510B2

5075 Self-Adhesive TPE Seal



*Anti-Microbial not available in clear


5075B BROWN
5075CL CLEAR*

9400 NGP-Edge® Intumescent Seal with PVC Cover

- Self-Adhesive



9400 GRAY
9400DKB BROWN

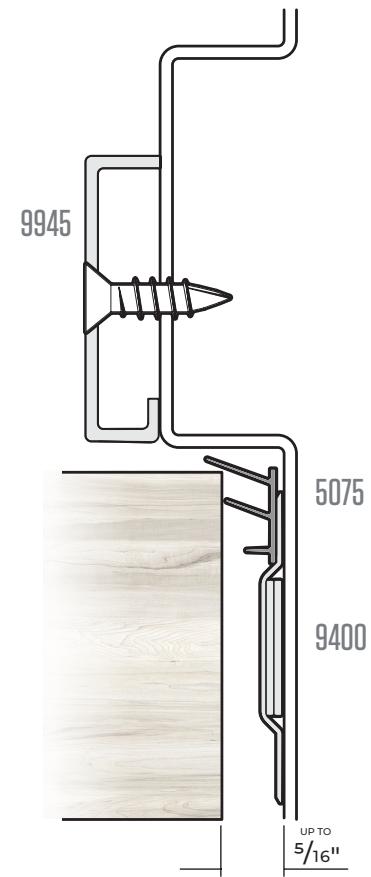

NGP-FDA-GAP-PCS-0919-A