


## Features

Designed for maximum versatility, the 1460, available with multiple cover options, can be used for both commercial and institutional applications. This fully universal closer offers a wide variety of options and fast and accurate installation.

<b>Certifications</b>	Grade 1 - ANSI A156.4, UL 10C, ADA, 100 Hour Salt Spray, Meets BAA - Buy American Act
<b>Body Construction</b>	<ul style="list-style-type: none"> <li>■ Cast Iron Body</li> <li>■ Full Complement Bearing</li> <li>■ 1-1/4" Diameter Piston</li> <li>■ 3/4" Diameter Single Heat Treated Pinion Journal</li> </ul>
<b>Fluid</b>	All Weather Fluid
<b>Handing</b>	Non-Handed
<b>Templating</b>	Peel-n-Stick templates - 1" x 7-1/2" Mounting Hole Pattern
<b>Size</b>	Adjustable Spring Size 1-6. Includes Patented Green Dial
<b>Warranty</b>	30 years
<b>Cover</b>	<ul style="list-style-type: none"> <li>■ Slim Line Plastic, Standard</li> <li>■ Full Plastic and Metal Designer Series, Optional</li> </ul>
<b>Fasteners</b>	Self Reaming and Tapping Screws (SRT)
<b>Mounting</b>	Hinge (Pull Side), Top Jamb (Push Side), Parallel Arm (Push Side)
<b>Arms</b>	Standard regular pull side, and top jamb
<b>Finishes/Colors/ Powder Coat</b>	<ul style="list-style-type: none"> <li>■ Aluminum (689)</li> <li>■ Statuary Bronze (690)</li> <li>■ Light Bronze (691)</li> <li>■ Black (693)</li> <li>■ Dark Bronze (695)</li> <li>■ Brass (696)</li> <li>■ Custom colors optional</li> </ul>
	<ul style="list-style-type: none"> <li>■ Optional SRI primer - powder coat only</li> <li>■ Optional plated finishes</li> </ul>

## Special Templates

Customized installation templates or products may be available to solve unusual applications. Contact LCN Product Support for assistance.

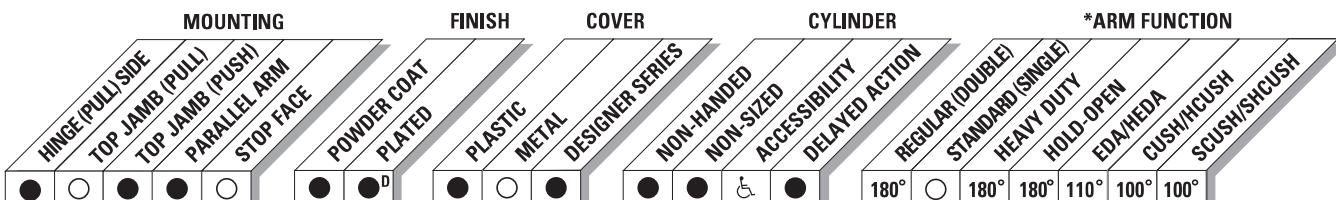

- AVAILABLE
- NOT AVAILABLE

 Closer available with less than 5.0 lbs. opening force on 36" door.

\* Maximum opening/hold-open point with standard template.

*D* = For designer series only