


Notes:

1. Backset is measured from centerline of bevel which is centerpoint of door thickness.
2. Door prep with 2-3/4" (70) backset meets ANSI/BHMA A156.115 standards for steel doors and ANSI/BHMA A156.115W standards for wood doors.
3. Dimensions given in inches and (mm).

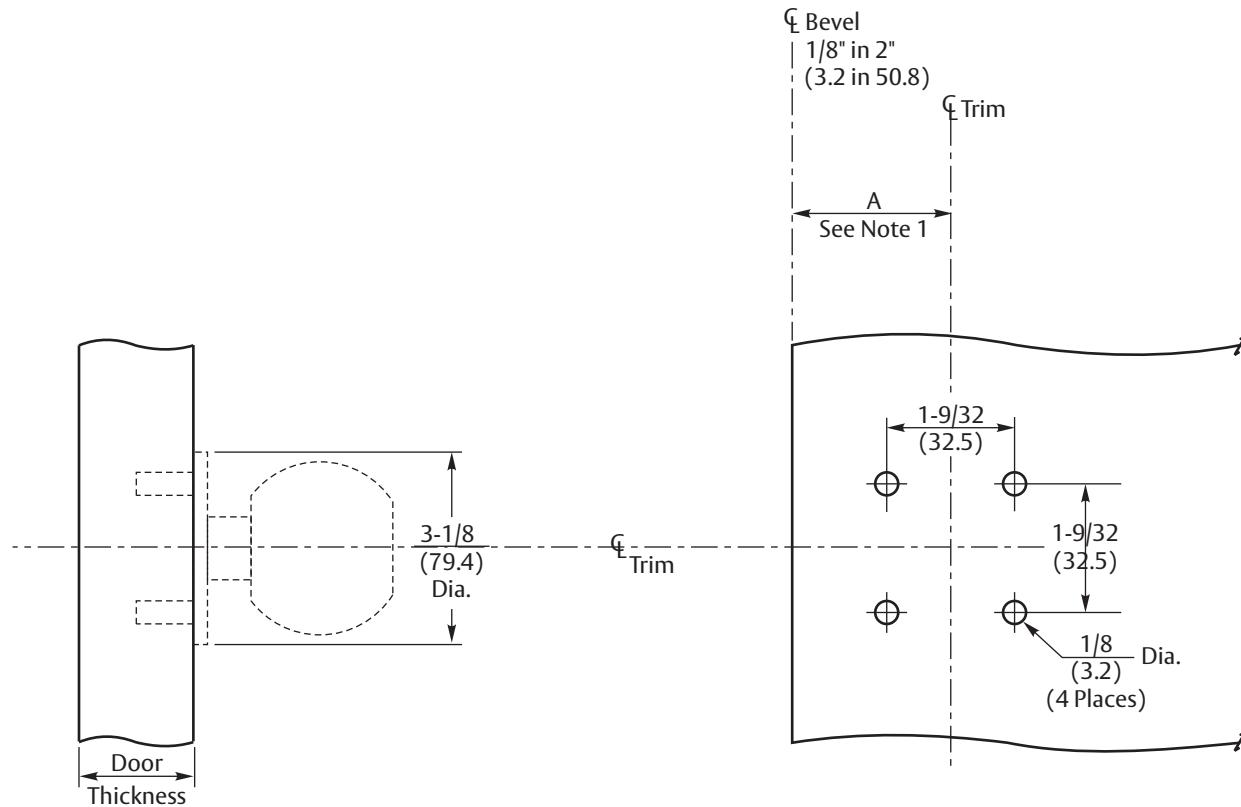

Backset Dim. "A"	
2-3/4 (69.9)	Regular
2-3/8 (60.3)	Optional

RESPONSIBILITY
DOOR AND FRAME MANUFACTURERS ARE
RESPONSIBLE FOR PROVIDING ADEQUATE
CONSTRUCTION OR REINFORCEMENTS FOR
PROPER INSTALLATION OF HARDWARE SHOWN.
ALL ARCHITECTURAL BUILDERS HARDWARE MUST
BE INSTALLED ON PROPERLY REINFORCED
DOORS AND FRAMES, REGARDLESS OF TYPE,
MATERIAL, OR METHOD OF CONSTRUCTION.

CK4300 Series
Grade 1 Knob Locks
Dummy Trim
Wood or Metal Door Preparation
(See ANSI/BHMA A156.115)

Corbin Russwin®
ASSA ABLOY
www.corbinrusswin.com
SUPERSEDES _____ DO NOT SCALE DRAWING
TEMPLATE NUMBER _____
T31239 DATE **03-16**