


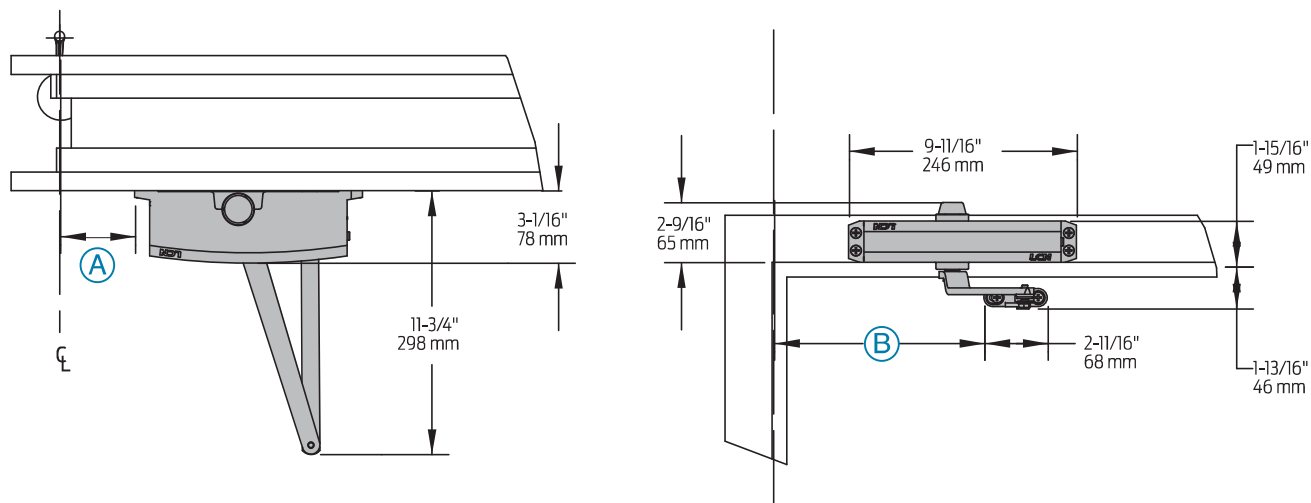

|                        |                                                                                                                                                                        |                                                |         |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|---------|
| <b>Butt Hinges</b>     | Should not exceed 5" (127 mm) in width                                                                                                                                 |                                                |         |
| <b>Auxiliary Stop</b>  | Recommended at hold-open point or where a door cannot swing 180°                                                                                                       |                                                |         |
| <b>Reveal</b>          | Arm Type                                                                                                                                                               | Maximum Reveal                                 | Opening |
|                        | Regular Arm                                                                                                                                                            | 0" to 5"                                       | 180°    |
|                        | Long Arm                                                                                                                                                               | 4" to 8"                                       | 165°    |
|                        | Hold-Open Arm                                                                                                                                                          | 0" to 2-3/4"                                   | 180°    |
|                        | Long Hold-Open Arm                                                                                                                                                     | 2" to 6-1/2"                                   | 180°    |
| <b>Top Rail</b>        | Requires 1-3/4" (44 mm) minimum. 2-1/2" (64 mm) minimum with closer on PLATE, 1250-18                                                                                  |                                                |         |
| <b>Head Frame</b>      | Less than 1-3/4" (44 mm) requires PLATE, 1250-18. For flush ceiling condition with 2" (51 mm) head frame, use PLATE, 1250-18. (Plate requires 1-3/8" (35 mm) minimum.) |                                                |         |
| <b>Maximum opening</b> | 100°:                                                                                                                                                                  | A = 7-3/16" (183 mm)<br>B = 12-15/16" (329 mm) |         |
|                        | 101° to 120°:                                                                                                                                                          | A = 5-11/16" (144 mm)<br>B = 11-7/16" (291 mm) |         |
|                        | or *121° to 180°:                                                                                                                                                      | A = 3-1/16" (78 mm)<br>B = 8-15/16" (227 mm)   |         |
|                        | Hold-open points up to maximum opening with hold-open arm                                                                                                              |                                                |         |
|                        | *Frame and trim permitting.                                                                                                                                            |                                                |         |