

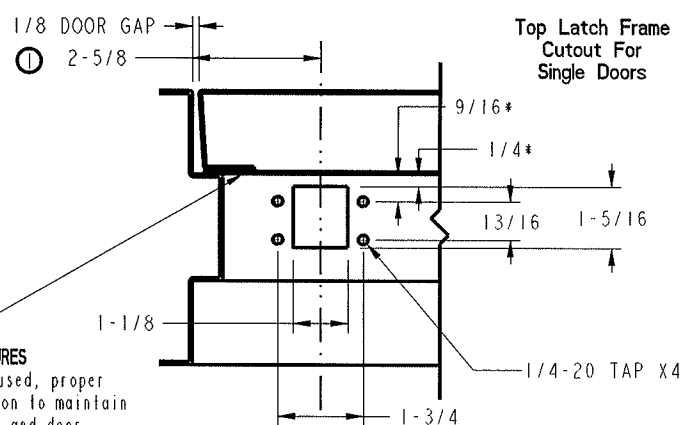


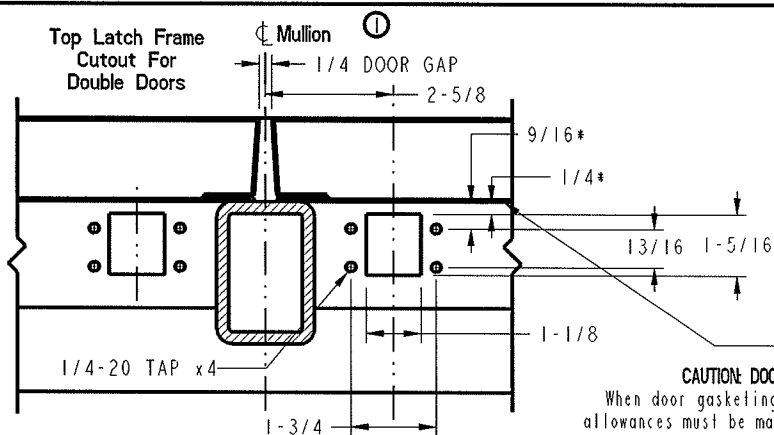

CAUTION: DOOR & FRAME MANUFACTURES
When door gasketing or silencers are used, proper allowances must be made for latch location to maintain a common centerline with top chassis and door.
"4" dimensions will be affected

Outside
Face of
Door

"A" Dimension Rear Mounting Bracket	
Door Width	Length
32"	25 3/4
36"	31 3/4
42"	37 3/4
48"	43 3/4

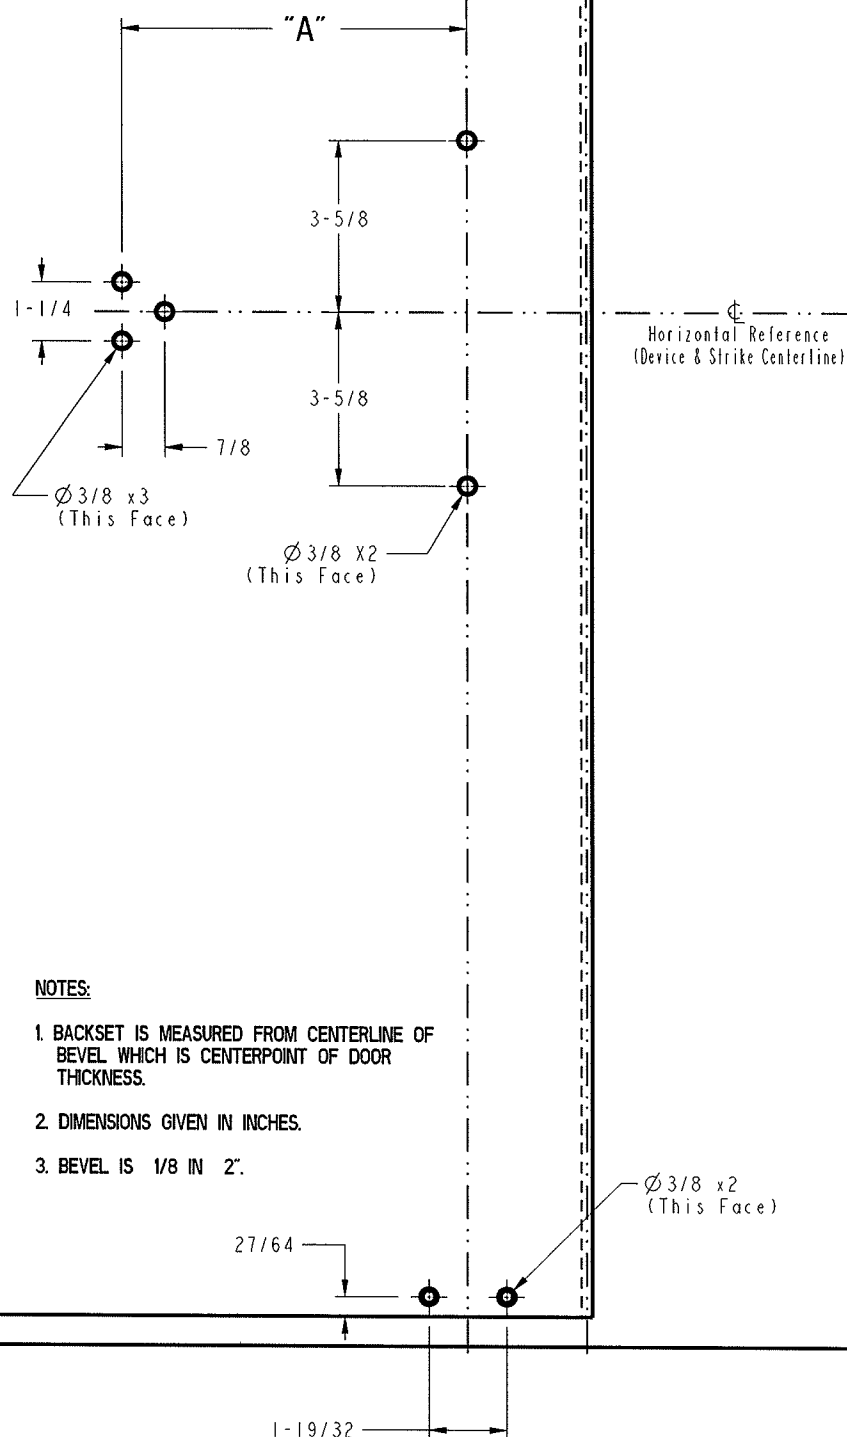


NOTES:

- BACKSET IS MEASURED FROM CENTERLINE OF BEVEL WHICH IS CENTERPOINT OF DOOR THICKNESS.
- DIMENSIONS GIVEN IN INCHES.
- BEVEL IS 1/8 IN 2".

Inside
Face of
Door

"B" Dimension Top Rod Guide	
Door Height	Length
7'	17 3/4
8'	23 3/4

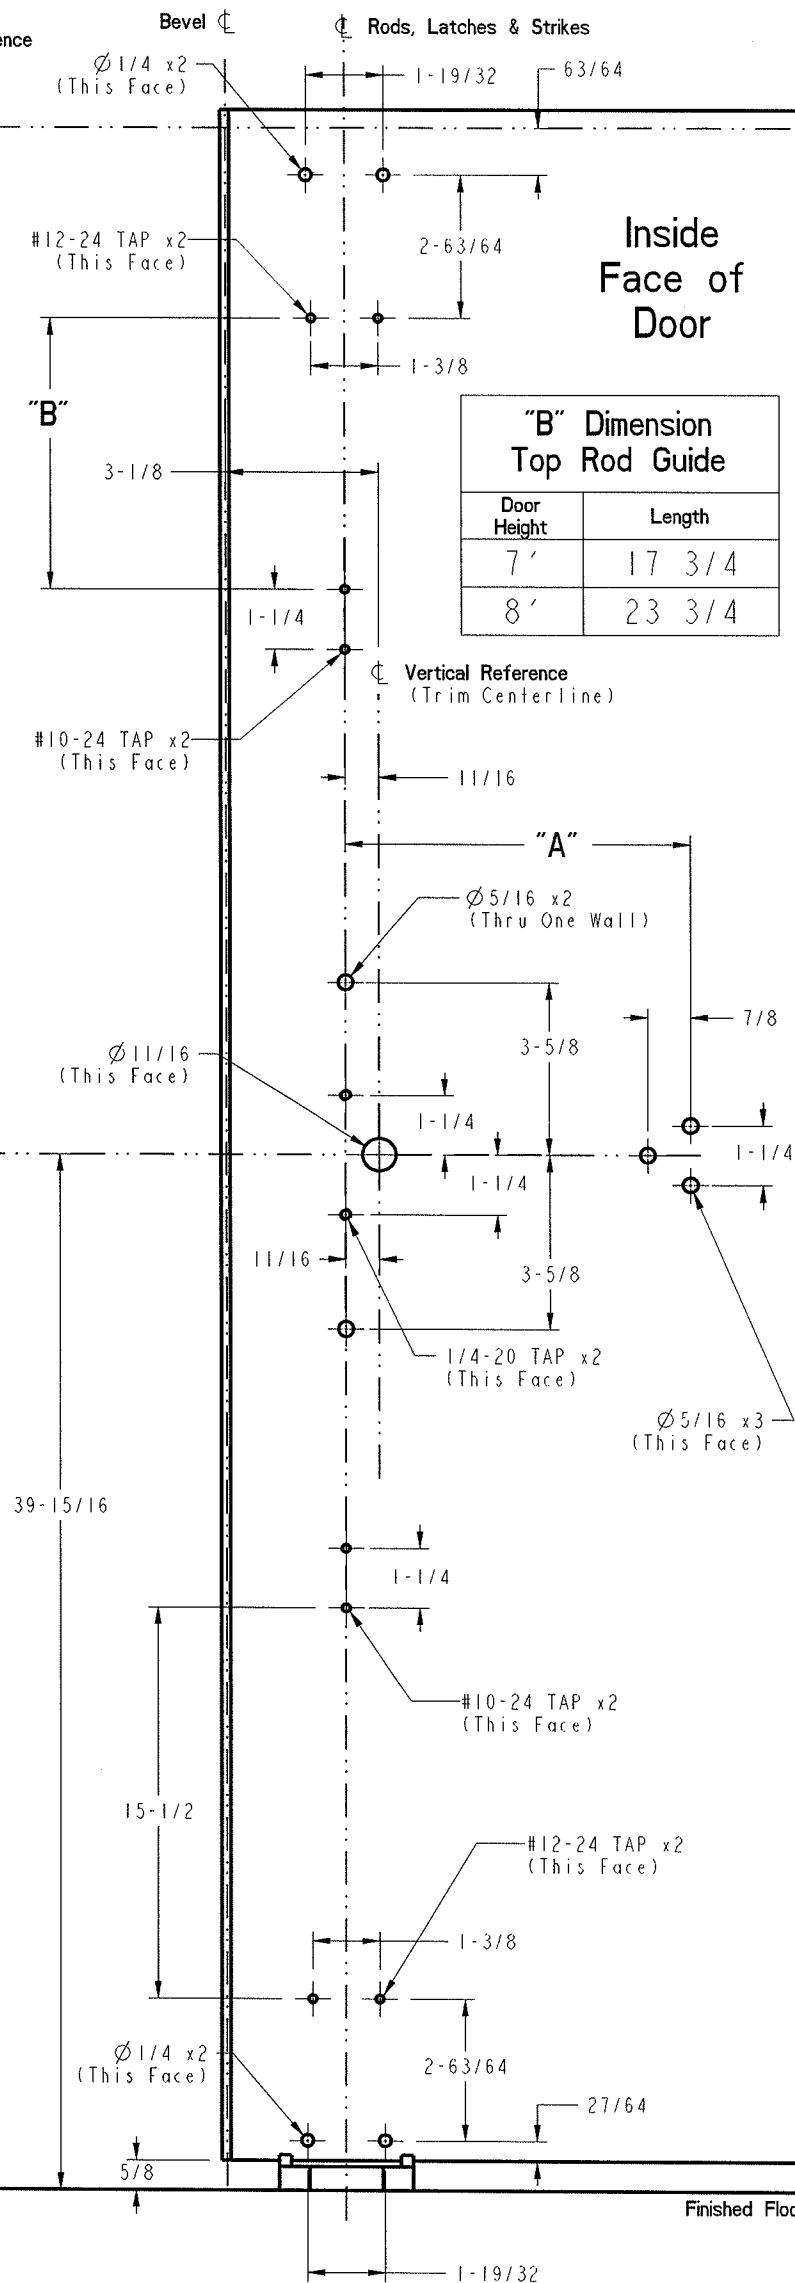

RESPONSIBILITY

DOOR AND FRAME MANUFACTURES ARE RESPONSIBLE FOR PROVIDING ADEQUATE CONSTRUCTION OR REINFORCEMENTS FOR PROPER INSTALLATION OF HARDWARE SHOWN. ALL ARCHITECTURAL BUILDERS HARDWARE MUST BE INSTALLED ON PROPERLY REINFORCED DOORS AND FRAMES, REGARDLESS OF TYPE, MATERIAL, OR METHOD OF CONSTRUCTION.

FE5400S & FE5400SA

MULTI-POINT EXIT DEVICE
(METAL DOORS)

**Corbin
Russwin**
ASSA ABLOY

DO NOT SCALE DRAWING

SUPERSEDES	T31177	DR.	JER	APP.
DATE	5-11	TEMPLATE NUMBER	T31177-1	