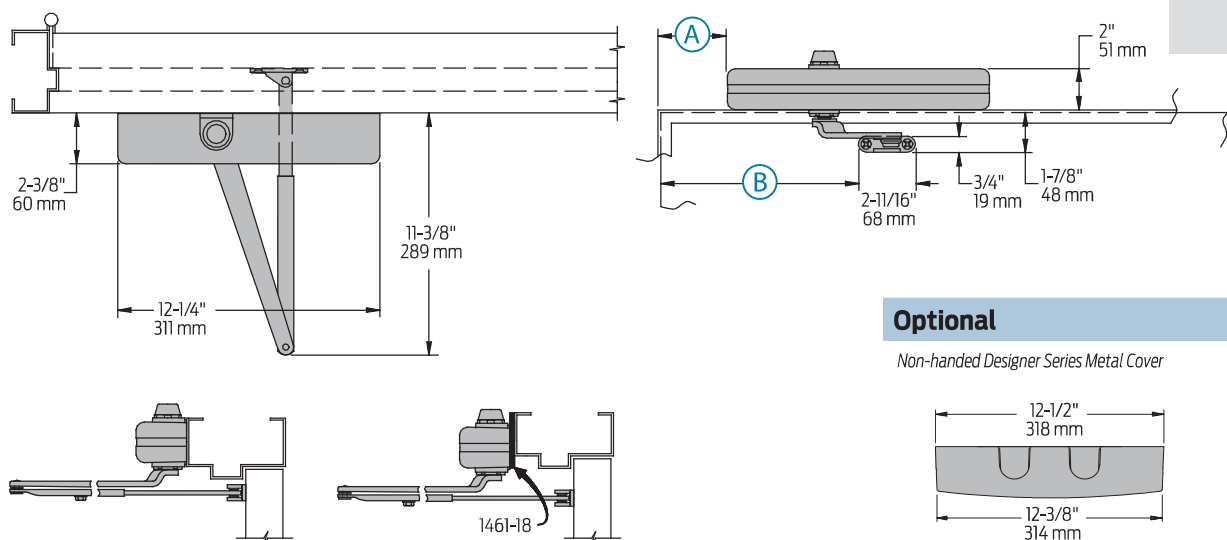



**Optional***Non-handed Designer Series Metal Cover*

Butt Hinges	Should not exceed 5" (127 mm) in width		
Auxiliary Stop	Recommended at hold-open point or where a door cannot swing 180°		
Reveal	Arm Type	Reveal	Max Opening
	Regular Arm	4-7/8"	Up to 140°
	Regular Arm	3-1/2"	Up to 180°
	Long Arm	7"	Up to 140°
	Hold-Open Arm	2-1/2"	Up to 180°
	Long Hold-Open Arm	4-7/8"	Up to 140°
Top Rail	Requires 1-7/8" (48 mm) minimum. 2-3/4" (70 mm) minimum with closer on PLATE, 1460-18		
Head Frame	Less than 1-3/4" (44 mm) requires PLATE, 1460-18. For flush ceiling condition with 2" (51 mm) head frame, use PLATE, 1460-18		
Delayed Action	■ Add suffix "DEL" to selected cylinder (eg. 1460 DEL). ■ Delays closing: 110° to 75° (using 110° template) 180° to 95° (using 180° template) ■ Delay time adjustable up to approximately 1 minute.		
Maximum opening	110°: A = 6-3/4" (169 mm) B = 11-1/4" (286 mm)		
	101° to 120°: A = 3" (76 mm) B = 7-1/2" (191 mm)		
	Hold-open points up to maximum opening with hold-open arm.		
	*Frame and trim permitting.		