




The concealed 3130 Series is designed to mount in a 1-3/4" interior door. The single lever arm and roller assembly provides complete concealment and the choice of finishes and track functions meet virtually all architectural requirements.

| | |
|--------------------------|---|
| Certifications | Grade 1 - ANSI A156.4, UL 10 C, ADA, 100 Hour Salt Spray, Meets BAA - Buy American Act |
| Body Construction | <ul style="list-style-type: none"> ■ Cast Iron Body ■ Full Complement Bearing ■ 1-1/8" Diameter Piston ■ 1/2" Diameter Double Heat Treated Pinion Journal |
| Fluid | All Weather Fluid |
| Handing | Handed |
| Size | Sized 1-3 |
| Warranty | 15 years |

| | |
|---|--|
| Fasteners | Wood Screws and Torx Security Screws (optional) |
| Mounting | Concealed (in door); consult factory for installation with pivots |
| Arms | Standard arm and track |
| Finishes/Colors/ Powder Coat | <ul style="list-style-type: none"> ■ Aluminum (689) ■ Statuary Bronze (690) ■ Light Bronze (691) ■ Black (693) ■ Dark Bronze (695) ■ Brass (696) ■ Custom colors optional ■ Optional SRI primer - powder coat only ■ Optional plated finishes |

Special Templates

Customized installation templates or products may be available to solve unusual applications. Contact LCN Product Support for assistance.

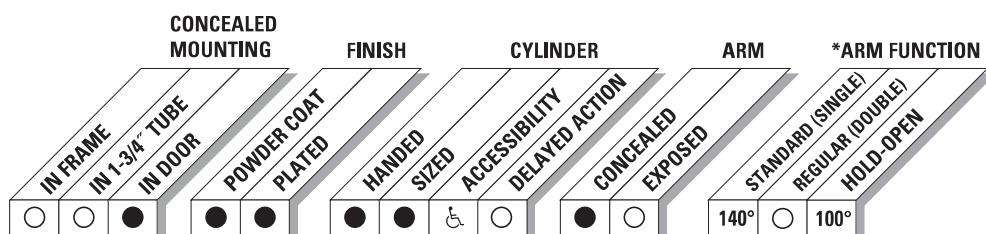

● AVAILABLE
○ NOT AVAILABLE

● Closer available with less than 5.0 lbs. opening force on 36" door.

* Maximum opening/hold-open point with standard template. See individual closer series for degrees of opening per installation.