


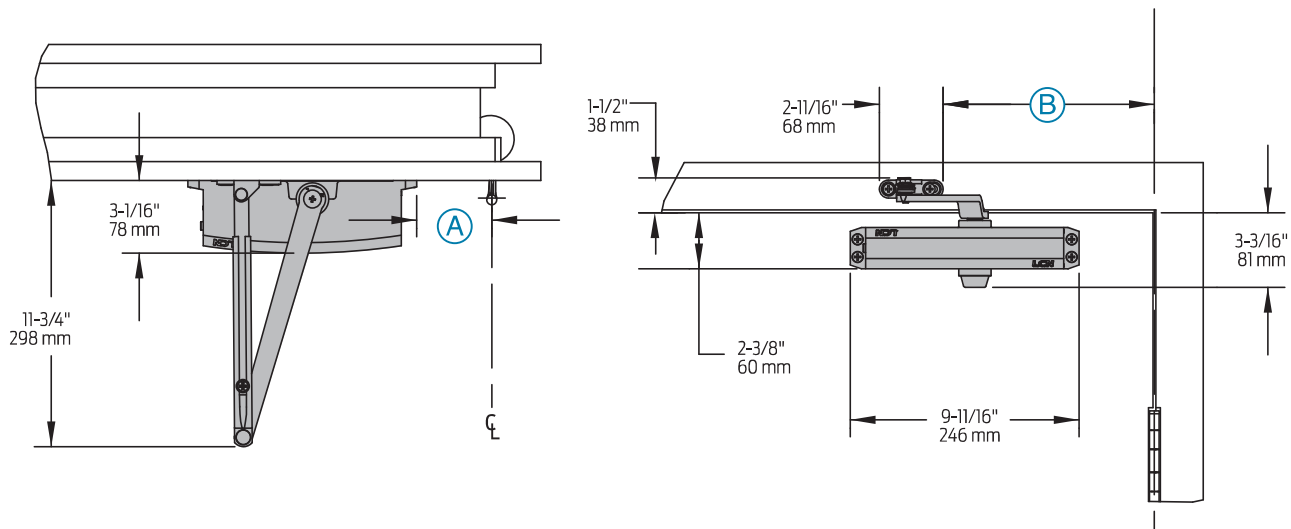

Butt Hinges	Should not exceed 5" (127 mm) in width	
Auxiliary Stop	Recommended at hold-open point or where a door cannot swing 180°	
Reveal	Should not exceed 3/4" (19 mm) for regular arm or 1/2" (13 mm) for hold-open arm	
Top Rail	Less than 2-3/8" (60 mm) requires PLATE, 1250-18	
Clearance	3-1/16" (78mm) behind door required for installation.	
Maximum opening	100°:	A = 6-11/16" (170mm) B = 12-7/16" (316 mm)
	101° to 120°:	A = 5-11/16" (144mm) B = 11-7/16" (291 mm)
	or *121° to 180°:	A = 3-1/16" (78 mm) B = 8-15/16" (227 mm)
	Hold-open points up to maximum opening with hold-open arm *Frame and trim permitting.	