



The 4040SE SENTRONIC® is a heavy duty, non-handed, nonsized closer/holder designed to provide single point hold-open for fire and smoke barrier doors. The door is held open until current interruption releases the holding mechanism and the door closes. Single lever (track) arm closer is specifically designed for interior doors. Choice of finishes, track functions, and installation accessories meet virtually all life safety requirements.

Certifications	Grade 1 - ANSI A156.15, UL 10C, 100 Hour Salt Spray, Meets BAA - Buy American Act, NFPA 101
-----------------------	---

Body Construction	<ul style="list-style-type: none"> ■ Cast Iron Body ■ Full Complement Bearing ■ 1-1/2" Diameter Piston ■ 3/4" Diameter Double Heat Treated Pinion Journal
--------------------------	---

Fluid	All Weather Fluid
--------------	-------------------

Handing	Non-Handed
----------------	------------

Size	Adjustable Spring Size, up to 4
-------------	---------------------------------

Warranty	2 years
-----------------	---------

Cover	<ul style="list-style-type: none"> ■ Clip-on plastic, standard ■ Metal, optional
--------------	--

Fasteners	Wood and machine screw pack
------------------	-----------------------------

Mounting	Hinge (Pull Side), Stop Face (Push Side)
-----------------	--

Arms	Standard arm and SE track, standard Double egress arm and SEL track, optional
-------------	--


Finishes/Colors/ Powder Coat	<ul style="list-style-type: none"> ■ Aluminum (689) ■ Statuary Bronze (690) ■ Light Bronze (691) ■ Black (693) ■ Dark Bronze (695) ■ Brass (696) ■ Custom colors optional
---	--

- Optional SRI primer - powder coat only
- Optional plated finishes

Wiring	Concealed or surface, interfaces with fire alarm systems
---------------	--

Special Templates

Customized installation templates or products may be available to solve unusual applications. Contact LCN Product Support for assistance.

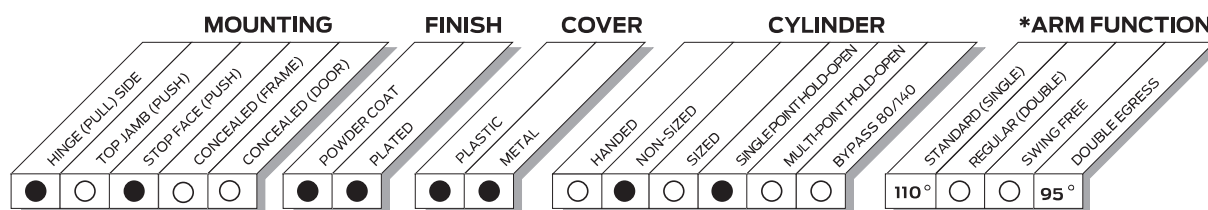

● AVAILABLE
○ NOT AVAILABLE

* Maximum opening/hold-open point with standard template. See individual closer series for degrees of opening per installation.