


Mounting details

Stop face (Push Side)
Mounting

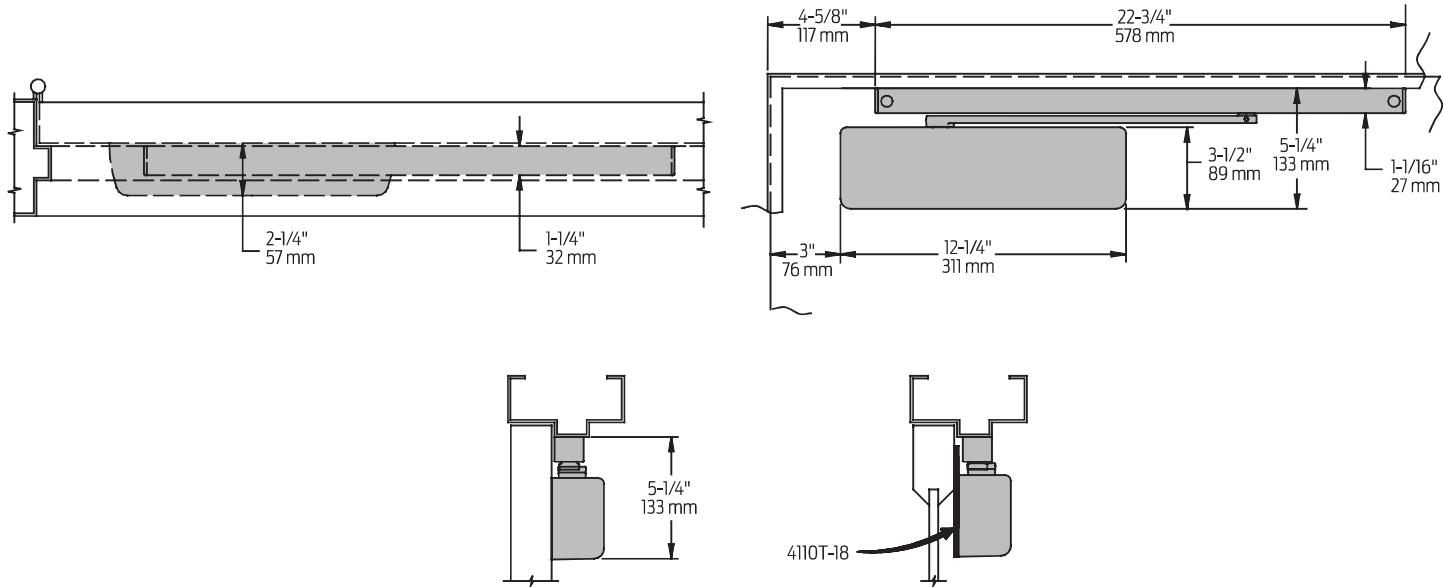

Butt Hinges	Should not exceed 5" (127 mm) in width
Auxiliary Stop	<ul style="list-style-type: none"> ■ Recommended at hold-open point or where a door cannot swing 110°. ■ Optional track bumper assembly assists backcheck in cushioning the opening swing of the door ■ It is not intended to replace an auxiliary stop
Clearance	Projects 2-1/4" (57 mm) from face of door
Top Rail	<ul style="list-style-type: none"> ■ Less than 5-1/4" (133 mm) measured from the stop, requires PLATE, 4110T-18 ■ Plate requires 2-1/4" (57 mm) minimum
Stop Width	Minimum 1-1/4" (32 mm)
Maximum Opening	<ul style="list-style-type: none"> ■ Templating allows 110° with standard track arm, limited to 100° with optional bumper tracks ■ Variable hold-open angles with infinite options

Notes:

- Many track style door closers are capable of allowing 180° of door swing
- The majority of track style closers are at their weakest closing force in the 180° – 130° range
- Consult factory for applications where door must swing 180°