

52 | **4510**
Standard
Duty
Deadlatch
DEADLATCHES



Aluminum



Swinging Door

4510

Standard Duty Deadlatch

4510 Standard Duty Deadlatches provide flexible traffic control during and after business hours.

Function

The 4510 Series Standard Duty Deadlatch offers flexibility of traffic control during and after business hours. A reverse turn of the key while the bolt is held retracted retains the bolt to allow two-way traffic for healthcare, financial institutions, retail, and other applications that require free entrance at certain times and exit-only at other times. Interchangeable, without stile modification, with any MS1850S Deadlock of same backset and faceplate shape. They do not, however, provide the same maximum security level as the MS® Deadlock.

Operation

Turn key or operate handle or paddle to retract spring-loaded latchbolt. To hold bolt retracted, push it in and secure by reverse turn of key. Lock accepts any standard mortise cylinder with MS® cam, available separately. Lock accepts any standard 1" [25.4 mm] length, 1-5/32" [29.4 mm] diameter mortise cylinder with MS® cam such as the 4036 Mortise Cylinder or thumbturn such as the 4066 Thumbturn, available separately. Lock accepts cylinder from either or both sides.



Features

Cylinder Backset

7/8" [22.2 mm], 31/32" [24.6 mm], 1-1/8" [28.6 mm] or 1-1/2" [38.1 mm].

Case

Steel with corrosion-resistant plating. Measures 1" x 5-13/16" x depth [25.4 mm x 147.6 mm x depth]. Depth varies by backset (see table on back of page).

Bolt Holdback

While bolt is held fully retracted, a reverse turn of the key retains the bolt, allowing the door to be free swinging.



Latchbolt

All metal with hardened steel internal pins. Handing is reversible without special tools. Measures 1/2" x 1" x 1/2" [12.7 mm x 25.4 mm x 12.7 mm] throw.

Auxiliary Bolt

All metal. Deadlocks latchbolt to prevent "loiding" or case-knife entry.

Faceplate

Measures 1" x 6-7/8" [25.4 mm x 174.6 mm].

Strike

Standard strike furnished is 4902-01 for flat jamb where door closes flush or nearly flush. Available separately: radius strike for opposite stile in paired doors; longer strike (4901) to cover slot strike of MS lock; long lip strikes for center hung doors.

Standard Package

Individually boxed with strike and mounting screws. Cylinder, paddle, handle available separately.

Shipping Weight

1-1/4 lbs (.57 kg). Also available in a 25-unit pack for volume customers. Please contact factory for more information.

Options

- Backset, faceplate shape, strike, handing, and finish must be specified when ordering.
- Available without faceplate or strike plate, select 4513.
- Available in choice of 313 Dark bronze anodized, 335 Black anodized, 628 Clear anodized.



US adamsrite.com | 800.872.3267 | customerservice.adamsrite@assaabloy.com


Canada assaabloydss.ca | 800.461.3007 | sales.dss.ca@assaabloy.com

Patent pending and/or patent www.assaabloydss.com/patents. Copyright © 2019, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Hanchett Entry Systems, Inc. is prohibited.

Updated: January 14, 2019

ASSA ABLOY, the global leader in door opening solutions

Dimensions

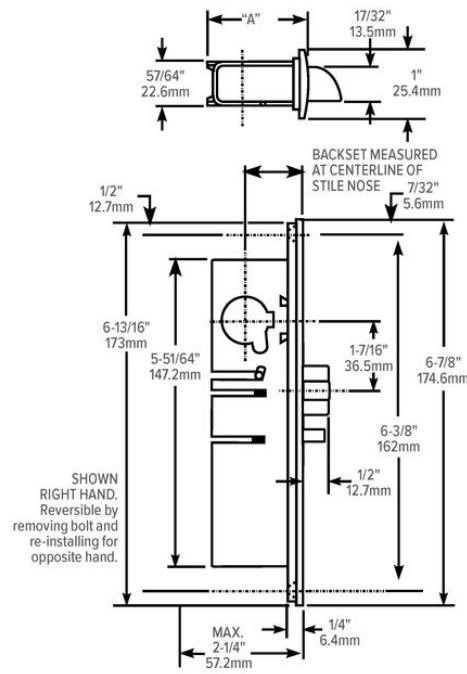


| | |
|-----------------------------|-------------|
| ARMORED FACEPLATE | 1" X 6-7/8" |
| FLAT 4510 | |
| RADIUS 4511 | |
| RADIUS W/ WEATHERSTRIP 451W | |
| LH BEVEL 4512-X5 | |
| RH BEVEL 4512-X6 | |

| BACKSET | "A" |
|---------|----------|
| 7/8" | 1-33/64" |
| 22.2mm | 38.5mm |
| 31/32" | 1-19/32" |
| 24.6mm | 40.5mm |
| 1-1/8" | 1-49/64" |
| 28.6mm | 44.8mm |
| 1-1/2" | 2-9/64" |
| 38.1mm | 54.4mm |

All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions.

Stile Preparation


Identical to MS1850S Series (Also see prep for 4590 Paddle)

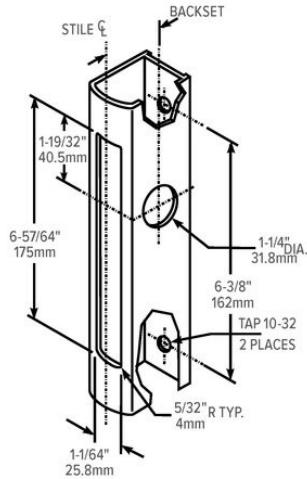

4510
Standard
Duty
Deadlatch

53
DEADLATCHES

Latch Paddle & Cylinder Installation

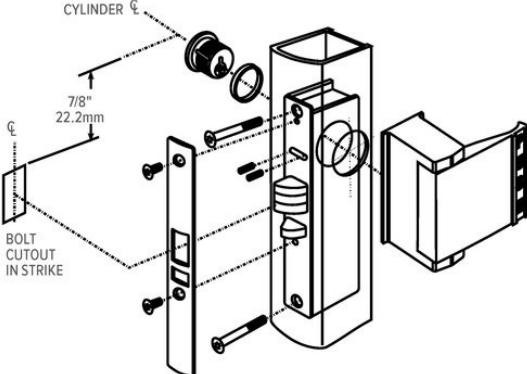

How to Order & Related Products

4510 Standard Duty Deadlatch: Specify quantity and the following information. Order related products separately.

| MODEL | FACEPLATE | BACKSET | HANDING | STRIKE SIZE | STRIKE SHAPE/LIP LENGTH | FACEPLATE FINISH |
|-------|---|----------|----------------------------|--------------------------|---------------------------------|--------------------------|
| 451 | 1 | -3 | 6 | -2 | 01 | -628 |
| | 0 Flat | 1 7/8" | 5 LH or RHR 6 RH or LHR | 1 Mortised (4901) 4-5/8" | 01 Flat/Standard Jamb | 313 Dark Bronze Anodized |
| | 1 Radius | 2 31/32" | | 2 Mortised (4902) 2-5/8" | 02 Radius/Standard Stiles | 335 Black Anodized |
| | 1W Radius w/ Weatherstrip | 3 1/8" | | | 17 Flat/Center Hung 4" Jamb | 628 Clear Anodized |
| | 2 Bevel | 4 1/2" | | | 21 Flat/Center Hung 4-1/2" Jamb | |
| | 3 Without faceplate, without strike plate | | | | | |

RELATED When purchasing this product, please consider the following related products, available separately:

| ELECTRIC STRIKES | TRIM | CYLINDERS | ACCESSORIES |
|--|---|---|---|
| 7100/7101, 7110/7111, 7130/7131, 7140 Electric Strikes, 7400/7401, 7410/7411, 7430/7431, 7440 Electric Strikes | 3080, 3080E Series Entry Trim, 3090-150, A100 Series Keyless Entry, 4560, 4565 Deadlatch Handles, 4568, 4569 Eurostyle Deadlatch Handles, 4590, 4591 Paddles, 4600 Deadlatch Handle | Standard 1" length, 1-5/32" diameter mortise cylinder with MS® cam such as 4036 Mortise Cylinder, 4066 Thumblturn MS4043 Cylinder guard | 4104 Mounting Bridge, 91-0965 Mounting Kit for radiused door, 91-0966 Mounting Kit for beveled door, 26-00090XX Tube Spacer, 4901, 4902 Deadlatch Strikes |