


NOTES:

- Backset is measured from centerline of bevel which is centerpoint of Door Thickness. "A" is adjustable for 2-3/8 (60.3) or 2-3/4 (69.3)
- Dimensions given in inches and (mm)
- Door prep applied to all functions.
- Door and Frame prep with 2-3/4" (69.9) Backset and 1-1/8" (28.6) Wide Lock Front meets ANSI standard for Bored Deadlocks.

TEMPLATE CROSS REFERENCE	
DESCRIPTION	TEMPLATE
423L71 ANSI Strike	T30543

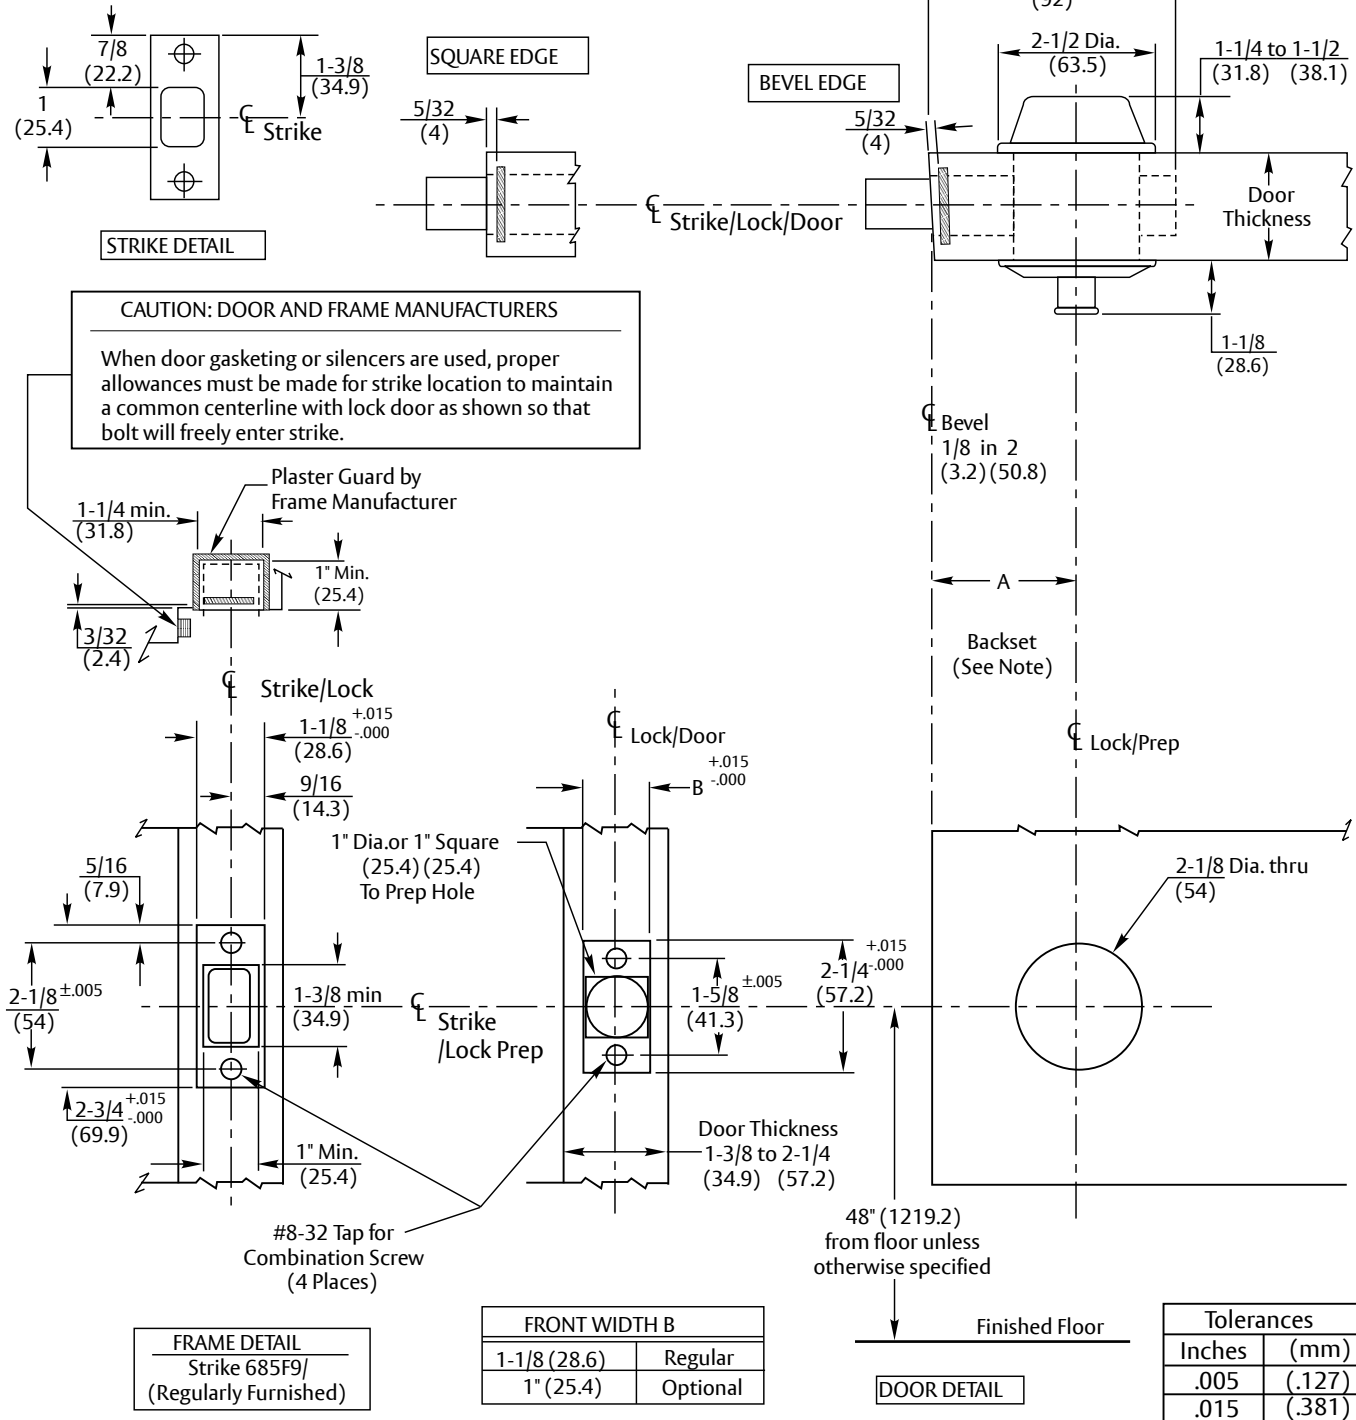

RESPONSIBILITY

DOOR AND FRAME MANUFACTURERS ARE RESPONSIBLE FOR PROVIDING ADEQUATE CONSTRUCTION OR REINFORCEMENTS FOR PROPER INSTALLATION OF HARDWARE SHOWN. ALL ARCHITECTURAL BUILDERS HARDWARE MUST BE INSTALLED ON PROPERLY REINFORCED DOORS AND FRAMES, REGARDLESS OF TYPE, MATERIAL, OR METHOD OF CONSTRUCTION.

DL3200 Cylindrical Deadbolt DL2200 Cylindrical Deadbolt

Corbin Russwin
ASSA ABLOY

www.corbinrusswin.com

SUPERSEDES	DO NOT SCALE DRAWING		
TEMPLATE NUMBER	T31191	SHEET	1 of 1
		DATE	08/24

Experience a safer and more open world

Copyright © 2011, 2022, 2024, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.