

# 24 Series

## Accessories and strikes

### Strikes

#### For rim devices



**264**  
2 7/8" x 1 1/4" x 9/16"  
(H x W x D)  
Panic device only.



**299**  
7 7/8" x 1 1/4" x 13/16"  
(H x W x D)  
Panic device only.



**299F**  
2 7/8" x 1 1/4" x 13/16"  
(H x W x D)



**1606**  
2 7/8" x 1 3/8" x 3/8"  
(H x W x D)  
Panic device only.



**1439 Blade stop**  
1 3/4" x 1 7/8" x 1/2"  
(H x W x D)  
Panic device only.

#### For surface and concealed vertical rod devices



**2130**  
(F)24-V and (F)24-C  
standard bottom  
strike for grouting  
into concrete or  
masonry floors.



**3788**  
Furnished top  
of (F)24-V.




**4155**  
Optional strike.  
Panic device only.



**4188**  
Top strike for  
(F)24-C.

### Accessories



**4215**  
Angle bracket for flush transom applications.  
Does not require elimination of latch  
retention feature. Accepts 3788 strike for  
24-V device.



#### Surface vertical extension rods


Extension rods are  
available in 12", 24"  
and 36" lengths in  
all finishes. Both  
ends tapped and  
all-thread included  
as connector.



#### Concealed extension rods

Extension rods are  
available in 12", 24"  
and 36". Both ends have  
pressed-in, threaded  
inserts.

#### Filler plates

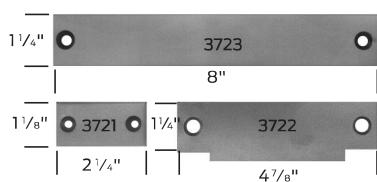

#### 3721/3722/3723

Steel filler plates

- 3721 Cylindrical lock front filler
- 3722 Strike filler - set no. SC for 161 cutout
- 3723 Mortise lock front filler
- 3722 Strike filler - set no. SM for 86 cutout