


- NOTES:
1. DIMENSIONS GIVEN IN INCHES AND (MM).
 2. 1-1/4" STRIKE LIP SUITS FRAME FOR 1-3/4" THICK DOOR.

TEMPLATE CROSS REFERENCE


DESCRIPTION	TEMPLATE
83L96 OPTIONAL STRIKE	T30497
610L44 ANSI STRIKE - DOUBLE DOORS	T30639
82L67 OPTIONAL STRIKE - DOUBLE DOORS	T30499
UT5200 SERIES x M11 (ANSI STRIKE)	T30638
UT5200 SERIES x M11 (OPTIONAL STRIKE)	T30539

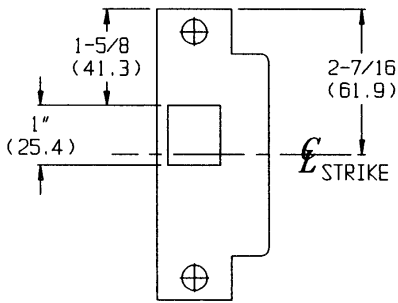


STRIKE DETAIL

CAUTION: DOOR AND FRAME MANUFACTURERS

WHEN DOOR GASKETING OR SILENCERS ARE USED, PROPER ALLOWANCES MUST BE MADE FOR STRIKE LOCATION TO MAINTAIN A COMMON CENTERLINE WITH LOCK AND DOOR AS SHOWN SO THAT BOLT WILL FREELY ENTER STRIKE.

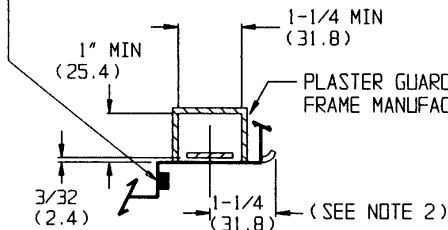

STRIKE/LOCK/DOOR

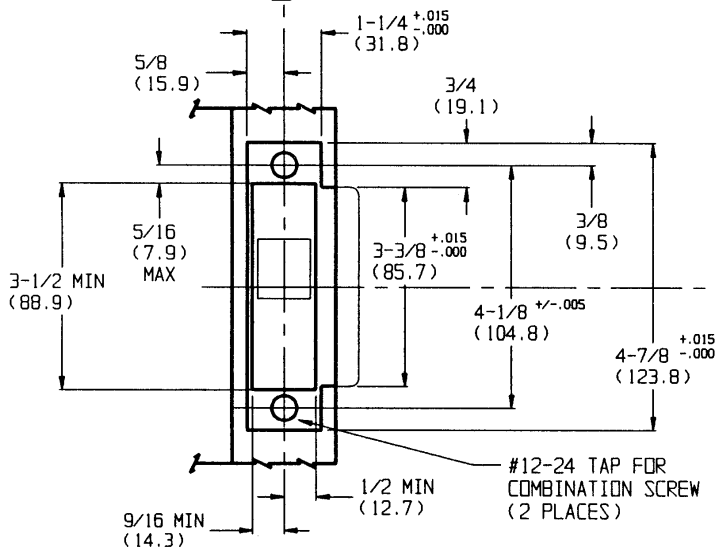


FRAME DETAIL

ANSI STRIKE 236L75
(REGULARLY FURNISHED)

CAUTION:

LOW SIDE OF BEVEL
1/8 IN 2" (3.2) (50.8)

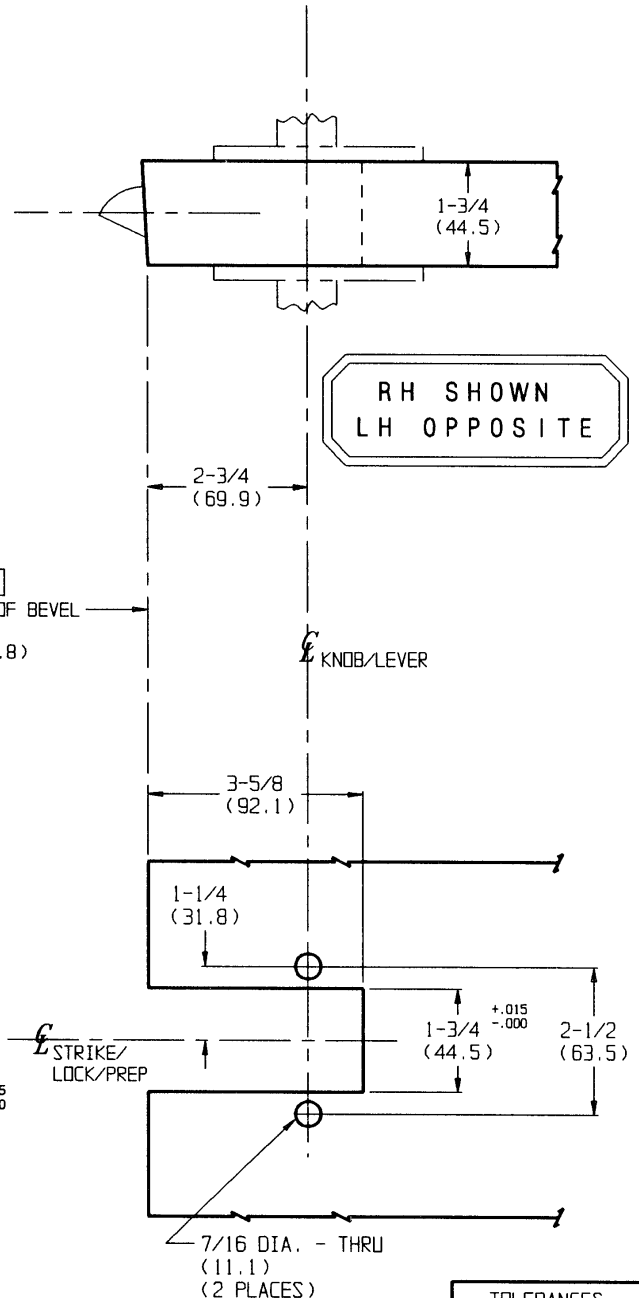

DOOR DETAIL

TOLERANCES

INCHES	(MM)
.005	(.127)
.015	(.381)

RESPONSIBILITY

Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames, regardless of the type, material, or method of construction.

UT5200 SERIES

UNIT LOCK

Corbin Russwin
www.corbinrusswin.com

DO NOT SCALE DRAWING

SUPERSEDES	VT30186	DR.	KJ	DATE	5/25/93	TEMPLATE NUMBER	T30495
------------	---------	-----	----	------	---------	-----------------	--------