


4030 Series


Mounting details

Parallel arm (Push Side)
and EDA mounting

Parallel arm mount

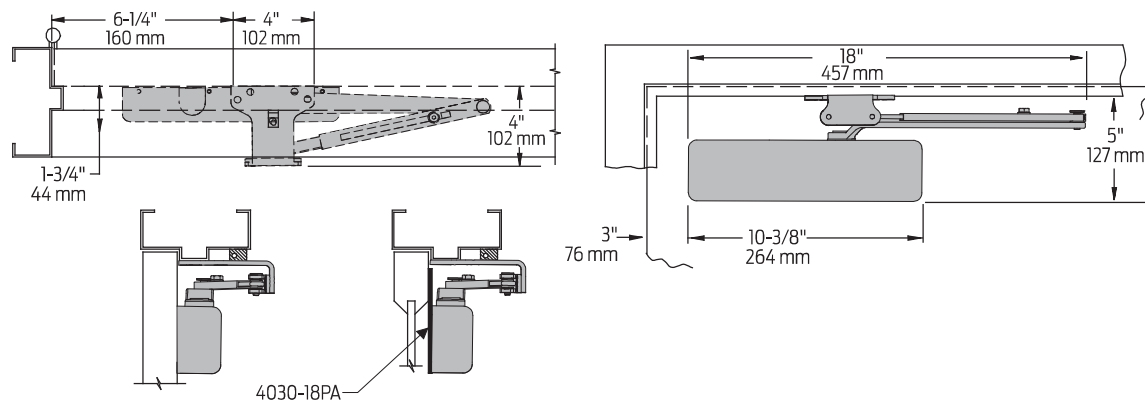

EDA mount

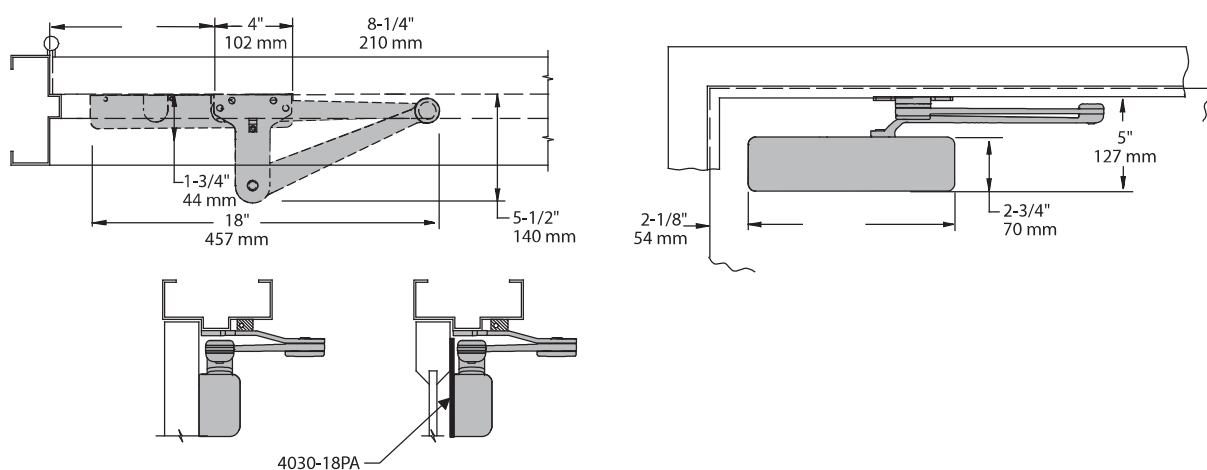

Butt Hinges	Should not exceed 5" (127 mm) in width
Auxiliary Stop	Recommended at hold-open point or where a door cannot swing maximum opening
Clearance	- For 4030-62PA shoe is 4" (102 mm) from door face - EDA arm is 5-1/2" (140 mm) from door face
Top Rail	- Less than 5" (127 mm) measured from the stop requires PLATE, 4030-18PA - Plate requires 1-3/4" (44 mm) minimum
Stop Width	Minimum 1" (25 mm)
Head Frame	Flush or single rabbetted requires PA SHOE ADAPTER, 4030-419
Blade Stop	Clearance, requires 1/2" (13 mm) BLADE STOP SPACER, 4030-61
Auxiliary Shoe	4030-62A allows installation of regular arm with overhead holder/stop - Special templating required
EDA Arm	Requires SHOE SUPPORT, 4030-30 for fifth screw anchorage where reveal is less than 3-1/16" (78 mm)
Maximum Opening	- REGULAR or HOLD-OPEN arms can be templated for 180° - EDA template allows 110° maximum opening - Hold-open points up to maximum opening with hold-open arm

Notes:

- 4030 closers ordered with EDA arms include 4030-201 FIFTH HOLE SPACER to support the shoe
- REGULAR or HOLD-OPEN arm mounting requires PA SHOE, 4030-62PA for regular or HOLD-OPEN arms. Add prefix "P" to closer description (eg. P4031.)
- P4031 closer includes 4030-201 FIFTH HOLE SPACER to support PA SHOE