

ED8000 Series

Product Catalog

DISCONTINUED



Experience a safer
and more open world

Introduction

ED8000 Series



Table of Contents

Introduction	2
Applications and Listings	3
Rim Exit Features	4
Surface Vertical Rod Exit Features	6
Rim/Vertical Rod Trims and Functions	8
Options & Accessories	11
Cylinders	12
Mullions	13
How to Order	14
Quick Codes	15
Helpful Terms	17
How to Specify	18

Applications

Heavy-duty steel construction and Grade 1 performance, priced for outstanding value. Meets rigorous life safety and security requirements, while offering pleasing aesthetics and trouble-free operation. Designed for high-use, high-abuse situations, ED8000 Series Pushpad Exit Devices can be teamed with a variety of Corbin Russwin trims to provide desired functions, styles and finishes in new construction and renovations, including these settings:

- School and University
- Health Care
- Government and Public
- Commercial and Industrial
- Office and Retail
- Transportation and Utilities
- Hotels and Conference Centers
- Religious

Advantages

- Meets ANSI Grade 1 requirements
- Easy-to-use pushpad for quick egress and ADA compliance
- Heavy-duty steel construction
- 3/4" latchbolt standard on rim device
- Low profile and projection for barrier-free code compliance
- No projecting parts to inhibit egress
- Devices accommodate various trim functions for flexibility
- Wide range of trim styles and finishes to match other Corbin Russwin products
- One-point dogging standard on panic-listed devices
- Devices available to satisfy C-UL US safety and fire requirements

Applications and Listings

ED8000 Series

WHI Listed by Warnock Hersey International Inc., as fire exit hardware.
C-UL US Listed by Underwriters Laboratories Inc., as fire exit hardware.

Single Door	Listing	Maximum Opening	Application
Rim ED8200 ED8200B ED8200A	Panic 1-1/2 Hr. WHI 3Hr. UL	4' x * 4' x 8' 4' x 8'	Surface applied; single point latching.
Surface Vertical Rod ED8400	Panic	4' x 10'	Surface applied; two point latching.

Pair of Doors with Removable Mullion	Listing	Maximum Opening	Application
Rim x Rim ED8200 x ED8200 x CR910 ED8200B x ED8200B x CR908A ED8200A x ED8200A x CR908A	Panic 1-1/2 Hr. WHI 3Hr. UL	8' x 10' 8' x 8' 8' x 8'	2 independent active doors with removable mullion.

Pair of Doors	Listing	Maximum Opening	Application
Surface Vertical Rod x Surface Vertical Rod ED8400 x ED8400 ED8400A x ED8400A	Panic 1-1/2 Hr. UL	8' x 10' 8' x 8'	2 independent doors with 2 point latching, swinging in the same direction. Overlapping astragal may not be required.
Surface Vertical Rod x Surface Vertical Rod (Double Egress) ED8400 x ED8400 ED8400A x ED8400A	Panic 3 Hr. UL	8' x 10' 8' x 8'	2 independent doors with 2 point latching, swinging in opposite directions. Overlapping astragal required for 3-hour openings.
Surface Vertical Rod x Rim ED8400 x ED8200 x S02	Panic	8' x 10'	S02 strike required on inactive door; coordinator recommended.

Note: All ED8000 Series Pushpad Exit Devices are UL305 panic listed.

*UL does not set a door height limitation on panic applications.

Rim Exit Features

ED8000 Series

ED8200 Panic Listed Rim Exit Device

ED8200B 1-1/2 Hour Fire Listed Rim Exit Device

ED8200A 3-Hour Fire Listed Rim Exit Device



Features

Handing

Non-handed.

Bar Length

Easily field cut to size.
Standard: 36" bar fits 31" - 36"

(787mm-914mm) door.

Optional: 30" bar fits 28" - 30"
(711mm-762mm) door; specify W030.
Optional: 42" bar fits 37" - 42"
(940mm-1067mm) door; specify W042.
Optional: 48" bar fits 43" - 48"
(1092mm-1219mm) door; specify W048.

Door Thickness

1-3/4" (44mm) standard.

Optional: 1-3/8" (35mm); specify D138.
Optional: 2" (51mm); specify D200.
Optional: 2-1/4" (57mm); specify D214.

Backset

2-3/4" (70mm). Device and trim cover standard ANSI A115.2 (Type 161) cylindrical lock preparation. (Backset changes when mullion is used.)

Style

Minimum width 5" (127mm).

Projection

2-1/2" (64mm) low profile for barrier-free access.

Latchbolt

3/4" (19mm) stainless steel pullman-type with stainless steel deadlocking latch.

Materials

Heavy-duty wrought steel chassis and pushpad; aluminum front and rear bar covers; stainless steel springs; nylon bearings.

Dogging

Standard on ED8200 devices: single point 1/4 turn dogging.
Optional: less dogging; specify M51.
Dogging not available on ED8200A and ED8200B devices.

Fasteners

Standard on ED8200 devices: machine screws and wood door fasteners.
Optional on ED8200 devices: sex nuts and bolts; specify M54.
Standard on ED8200A and ED8200B devices: sex nuts and bolts.

Strike

See Options and Accessories, page 11.

Functions and Trims

Thru-bolted lever, pull and knob trims available with wide range of functions; see Trims and Functions, pages 8-10.

Cylinders

Cylinder not included unless specified. See Quick Codes, page 15.

Removable Mullion

See Mullions, page 13.

Shim Kit

Optional for mounting device over glass bead vision light; specify M58.

Applications and Listings

See page 3.

Warranty

One-year limited.

Certification/Compliance

ANSI

Meets A156.3, Type 1, Grade 1.
Meets A117.1 Accessibility Code.

C-UL US

All devices listed for safety as panic hardware; devices comply with UL 305 standards for panic hardware. UL symbol on rear cover label indicates listing. Three-hour fire-rated devices listed as fire exit hardware for A label and lesser class 4' x 8' single or 8' x 8' double doors; UL symbol on rear cover label indicates listing.

Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Corbin Russwin, Inc. makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

Warnock Hersey International Inc.

ED8200B listed as fire exit hardware for installation on up to 1-1/2 hour fire doors, up to 8' x 8'.

California State Reference Code

This product has been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code.

NFPA

All exit devices comply with NFPA 101 Life Safety Code. All fire-rated devices comply with NFPA 80 Fire Doors and Windows.

ADA

Exit devices, lever trims and pulls comply with Americans with Disabilities Act.

Finishes

Painted finishes available on devices and some trims.


BHMA 689	Silver Aluminum Painted
BHMA 690	Dark Bronze Painted
BHMA 691	Light Bronze Painted
BSP	Black Suede Powder Coat
Plated finishes available on trims only.	
BHMA 605	Bright Brass
BHMA 606	Satin Brass
BHMA 611	Bright Bronze
BHMA 612	Satin Bronze
BHMA 613	Oxidized Bronze, oil rubbed, available lacquered
BHMA 618	Bright Nickel Plated
BHMA 619	Satin Nickel Plated
BHMA 622	Flat Black Coated
BHMA 625	Bright Chromium Plated
BHMA 626	Satin Chromium Plated
626C*	Satin Chromium Plated with MicroShield®
BHMA 722	Black oxidized bronze, oil rubbed

*G10, A6, N6 & PR6 trims are available with MicroShield®.


Rim Exit Features

ED8000 Series

ED8200 and ED8200B Rim Exit Devices

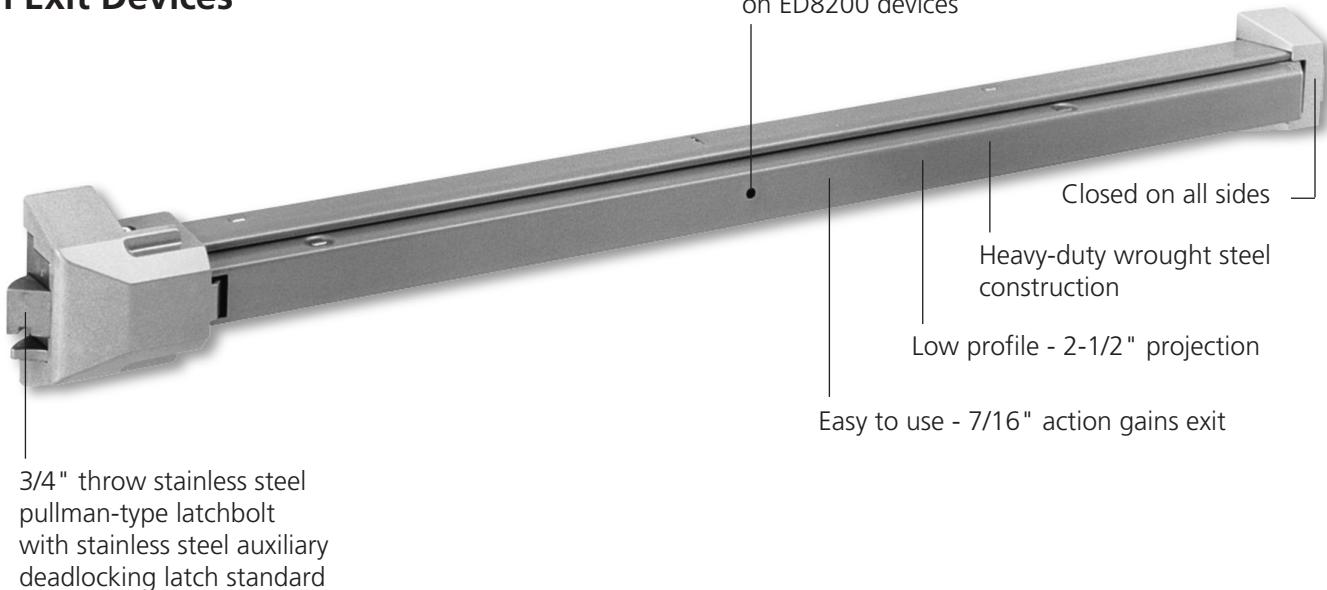

ED8200A Rim Exit Device

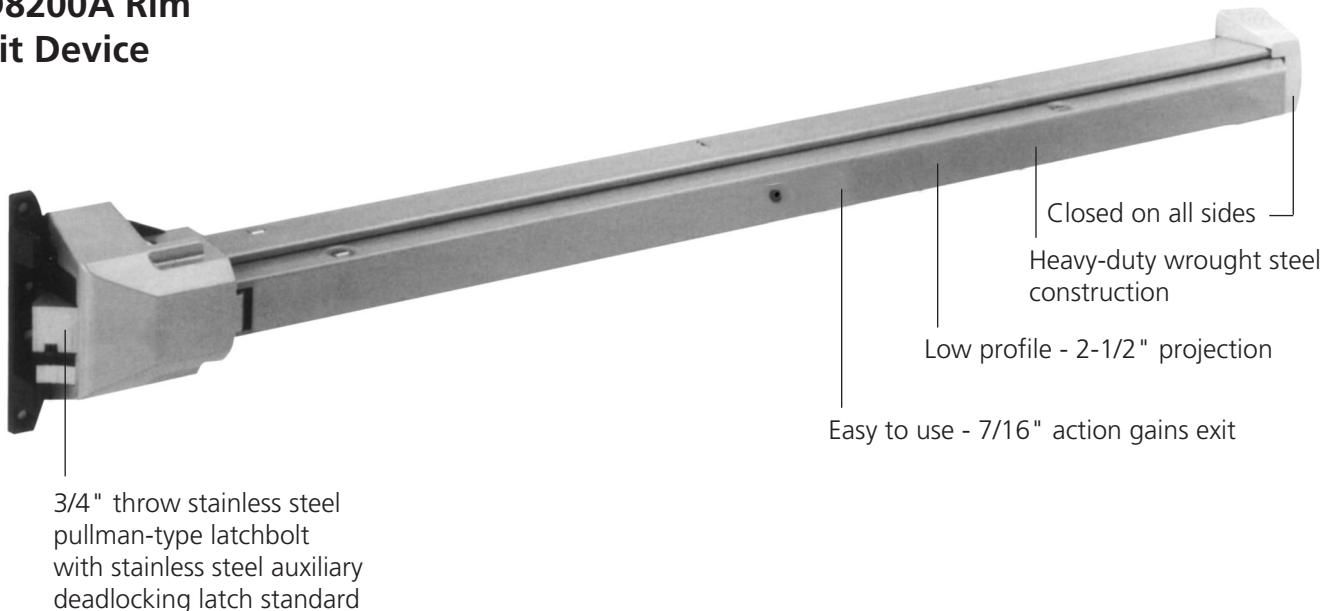

Vertical Rod Features

ED8000 Series

ED8400 Panic Listed Surface Vertical Rod Exit Device

ED8400A 3-Hour Fire Listed Surface Vertical Rod Exit Device

Features

Handing

Handed; specify hand.

Bar Length

Easily field cut to size.

Standard: 36" bar fits 31" - 36"

(787mm-914mm) door.

Optional: 30" bar fits 28" - 30"

(711mm-762mm) door; specify W030.

Optional: 42" bar fits 37" - 42"

(940mm-1067mm) door; specify W042.

Optional: 48" bar fits 43" - 48"

(1092mm-1219mm) door; specify W048.

Door Thickness

1-3/4" (44mm) standard.

Optional: 1-3/8" (35mm); specify D138.

Optional: 2" (51mm); specify D200.

Optional: 2-1/4" (57mm); specify D214.

Backset

2-3/4" (70mm). Device and trim cover standard ANSI A115.2 (Type 161) cylindrical lock preparation.

Style

Minimum width 5" (127mm).

Door Height

All top rods easily field cut to size.

Standard on ED8400 devices: top rod for 7'6" door.

Optional on ED8400 devices: top rod for doors up to 10'; specify H1000.

Standard on ED8400A devices: top rod for 8' door.

Projection

2-1/2" (64mm) low profile for barrier-free access.

Latchbolts

ED8400 devices:

Top: 1/2" interlocking drop latch.

Bottom: 5/8" pivoted.

ED8400A devices:

Top: 3/4" (19mm) steel pullman type with steel deadlocking latch. Bottom: 3/4" (19mm) deadbolt.

Vertical Rods

Inverted U-shaped rectangular.

Materials

Heavy-duty wrought steel chassis and pushpad; steel vertical rods; aluminum bar and latch covers; stainless steel springs; nylon bearings.

Dogging

Standard on ED8400 devices: single point 1/4 turn dogging.

Optional: less dogging; specify M51.

Dogging not available on ED8400A devices.

Fasteners

Standard on ED8400 devices: machine screws and wood door fasteners.

Optional on ED8400 devices: sex nuts and bolts; specify M54.

Standard on ED8400A devices: sex nuts and bolts.

Strike

See Options and Accessories, page 11.

Functions and Trims

Thru-bolted lever, pull and knob trims available with wide range of functions; see Trims and Functions, pages 8-10.

Cylinders

Cylinder not included unless specified. See Quick Codes, page 15.

Applications and Listings

See page 3.

Shim Kit

Optional for mounting device over glass bead vision light; specify M58.

Warranty

One-year limited.

Certification/Compliance

ANSI

Meets A156.3, Type 2, Grade 1.

C-UL US

All devices listed for safety as panic hardware; devices comply with UL 305 standards for panic hardware. UL symbol on rear cover label indicates listing. Three-hour fire-rated devices listed as fire exit hardware for A label and lesser class 8' x 8' double doors; UL symbol on rear cover label indicates listing.

Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Corbin Russwin, Inc. makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire

rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

California State Reference Code

This product has been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code.

NFPA

All exit devices comply with NFPA 101 Life Safety Code. All fire-rated devices comply with NFPA 80 Fire Doors and Windows.

ADA

Lever trims and pulls comply with Americans with Disabilities Act.

Finishes

Painted finishes available on devices and some trims.


BHMA 689	Silver Aluminum Painted
BHMA 690	Dark Bronze Painted
BHMA 691	Light Bronze Painted
BSP	Black Suede Powder Coat
Plated finishes available on trims only.	
BHMA 605	Bright Brass
BHMA 606	Satin Brass
BHMA 611	Bright Bronze
BHMA 612	Satin Bronze
BHMA 613	Oxidized Bronze, oil rubbed, available lacquered
BHMA 618	Bright Nickel Plated
BHMA 619	Satin Nickel Plated
BHMA 622	Flat Black Coated
BHMA 625	Bright Chromium Plated
BHMA 626	Satin Chromium Plated
626C*	Satin Chromium Plated with MicroShield®
BHMA 722	Black oxidized bronze, oil rubbed

*G10, A6, N6 & PR6 trims are available with MicroShield®.


Vertical Rod Features

ED8000 Series

ED8400 Surface Vertical Rod Exit Device






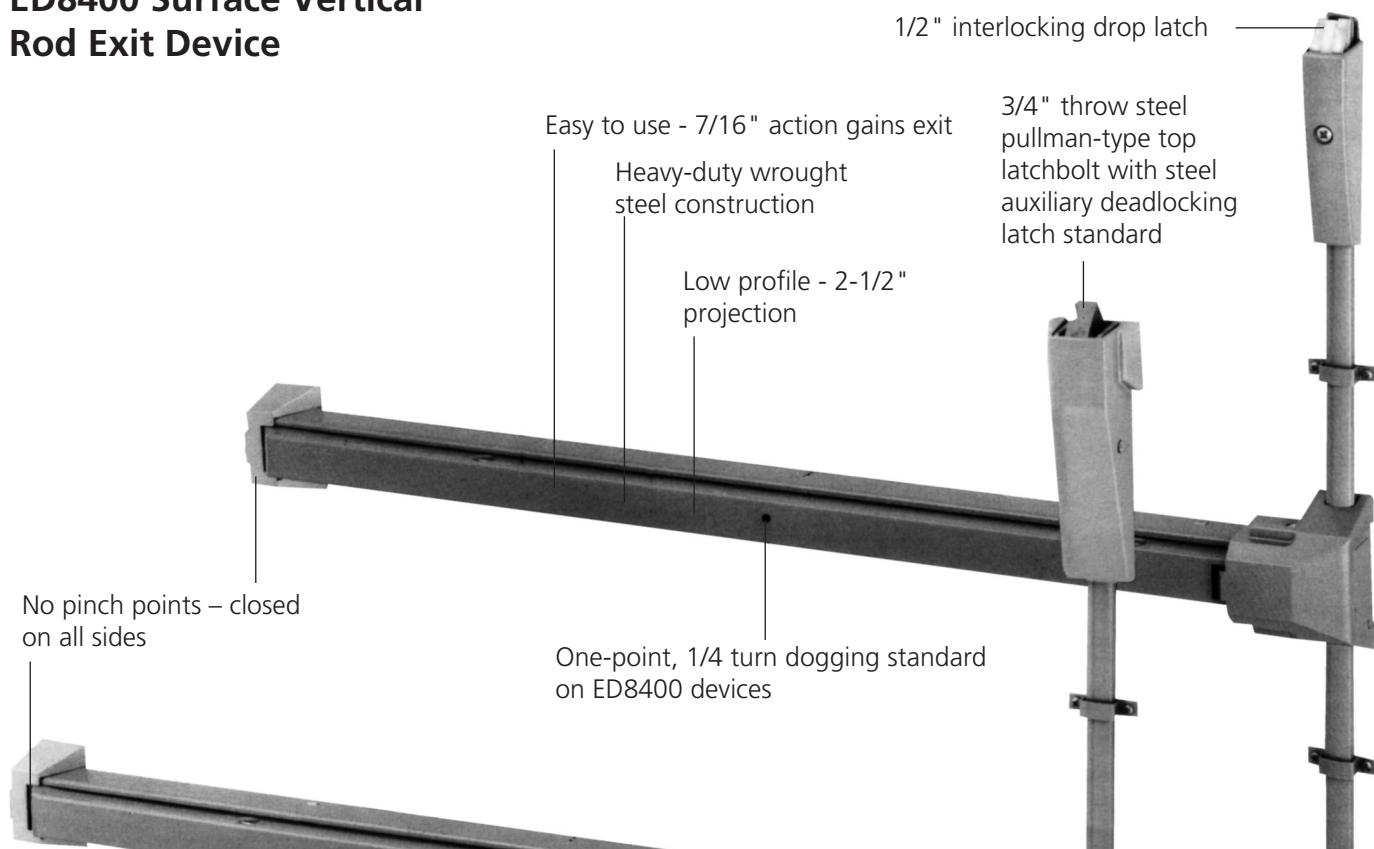


ED8400A Surface Vertical Rod Exit Device

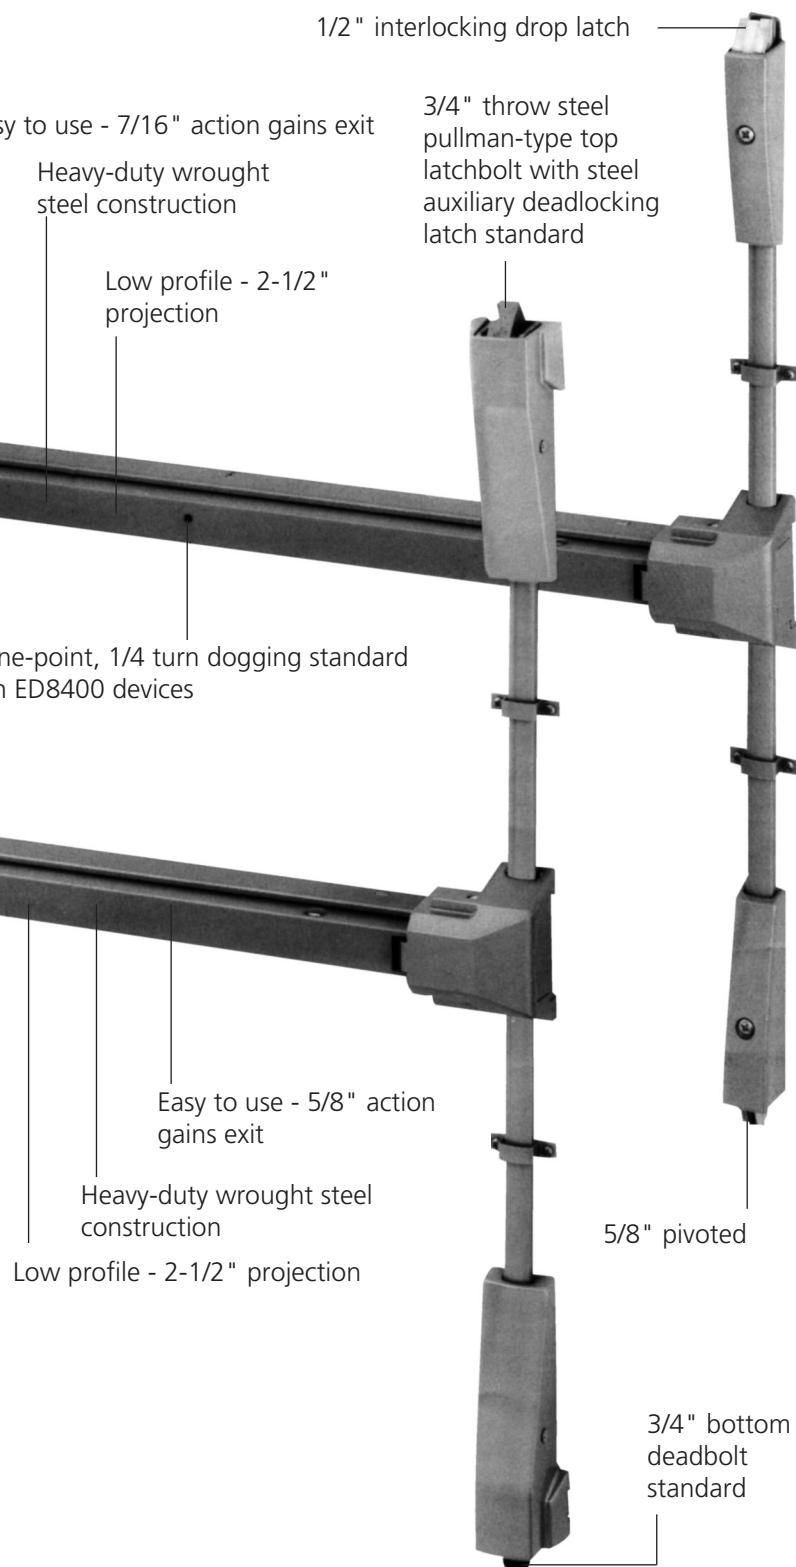

Functions

ED8000 Series

Rim ED8200 ED8200B ED8200A	Surface Vertical Rod ED8400 ED8400A	Type	ANSI No.	Function Descriptions	
Inside	Outside	Inside	Outside		
				Exit Only F01	<ul style="list-style-type: none"> • Exit only; no trim.
				Dummy F02	<ul style="list-style-type: none"> • Entrance by trim when actuating bar is locked down.
				Nightlatch F03	<ul style="list-style-type: none"> • Entrance by trim when latch bolt is retracted by key. Key removable only when locked.
				Classroom F08	<ul style="list-style-type: none"> • Entrance by knob or lever. Key locks or unlocks knob or lever.
				Passage —	<ul style="list-style-type: none"> • Latch bolt retracted by knob or lever.
				Storeroom (Lever Active) F09	<ul style="list-style-type: none"> • Entrance by knob or lever only when released by key. Key removable only when locked.







Indicates rigid grip when locked.

Note: Trims shown are for function representation only. See pages 9 and 10 for available trims.

Functions

ED8000 Series


Trim Design	Trim/Function						
	Passage	Dummy ANSI No. F02	Classroom ANSI No. F08	Nightlatch ANSI No. F03	Storeroom ANSI No. F09		
	Armstrong A6 Lever: Die cast zinc Rose: Wrought brass or bronze Cylinder: Key-in-lever Available in plated finishes only.		A610ET	A650ET	A655ET	A657ET ²	A659ET
	Newport N6 Lever: Die cast zinc Rose: Wrought brass or bronze Cylinder: Key-in-lever Available in plated finishes only.		N610ET	N650ET	N655ET	N657ET ²	N659ET
	Princeton PR6 Lever: Die cast zinc Rose: Wrought brass or bronze Cylinder: Key-in-lever Available in plated finishes only.		PR610ET	PR650ET	PR655ET	PR657ET ²	PR659ET
	Flat Plate F1 Plate: Steel Cylinder: Rim Available in plated and painted finishes.		N/A	F150ET ¹	N/A	F157ET ²	N/A

Notes:


1. Blank plate with no ANSI function.
2. Not recommended for use with ED8400 or ED8400A Surface Vertical Rod devices.

Functions

ED8000 Series

Trim Design		Trim/Function				
		Passage	Dummy ANSI No. F02	Classroom ANSI No. F08	Nightlatch ANSI No. F03	
	Wing Pull P8 Pull: Extruded Cylinder: Rim Available in painted finishes only.		N/A	P850ET	N/A	P857ET ²
	Key Only KO Cylinder: Rim Note: Available with cylinder option only. Ex: K057 x 6P		N/A	N/A	N/A	KO57ET ²

2. Not recommended for use with ED8400 or ED8400A Surface Vertical Rod devices.

Offset Pull Trim: P12, P13, P14*					
	Offset Pull P12 Clearance: 2-1/2 "				Specify Part Number, 716F50M x Finish ¹
	Offset Pull P13 Clearance: 2-1/2 "				Specify Part Number, 716F51M x Finish ¹
	Offset Pull P14 Clearance: 2-1/2 "				Specify Part Number, 716F52M x Finish ¹
					




1. Available in 605, 606, 612, 613, 626, 629 and 630 finishes.

*Available on 1-3/4" thick doors only.

Options and Accessories


ED8000 Series

Rim Strikes (Screws Included)

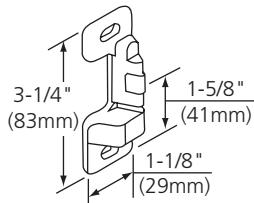


Shim Kits

For ED8200 & ED8200B
Part No. 557F928 622

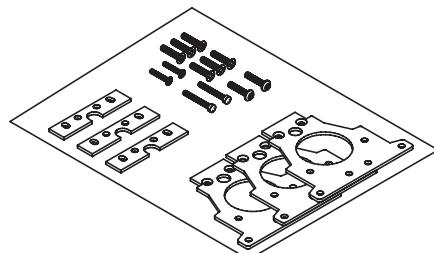

For ED8400
Part No. 557F948 622

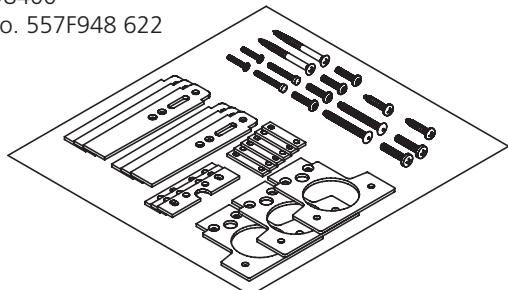

Rim Strike

Standard on ED8200 and ED8200B devices. To order separately, specify 386F45.

Rim x Vertical Rod Strike

Required for ED8200 devices when used on pair of doors with ED8400 device. To order with exit device, specify S02. To order separately, specify 468F30 x finish.

3-Hour Fire-Rated Rim Strike

Standard on ED8200A devices. To order separately, specify 518F06.

Rim Strike Shim

For doors with 1/2" stop, specify M59. To order separately, specify 391F575.

Vertical Rod Strikes (Screws Included)



Top Strike

Standard on ED8400 devices. To order separately, specify 446F21.




Surface Projecting Bottom Strike

Standard on ED8400 devices. To order separately, specify 446F22.




Flush Bottom Strike

Optional for ED8400 devices only. To order with exit device, specify S03. To order separately, specify 463F92.



Fire-Rated Top Strike


Standard on ED8400A devices. To order separately, specify 526F52.




Fire-Rated Bottom Strike

Standard on ED8400A devices. To order separately, specify 526F53.

For ED8200A
Part No. 557F938 622

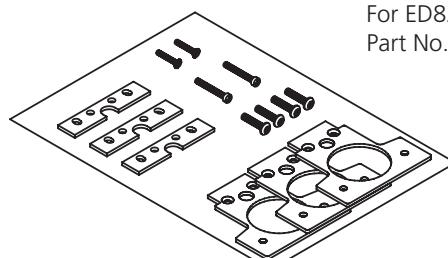

For ED8400A
Part No. 557F958 622

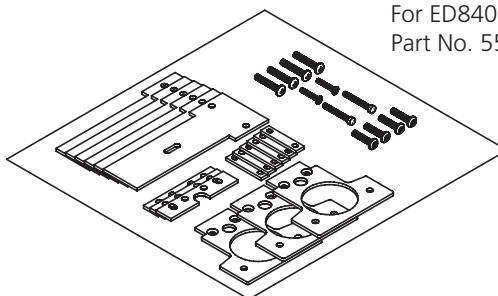

Cylinders

ED8000 Series

Cylinders

L4 keyway standard. To order with Exit Device, see Quick Codes, page 15. To order separately, specify Part No. x keyway x Finish (e.g., CR2000-033-7 x L4 x 626).


	Cylinder Type	Part No.	Description
Key-in-Lever for A6, N6 and PR6 trim		CR2000-033 CR2000-033-7 CR2010-033 CR2020-033 CR2027-033	6-pin 7-pin 6-pin, Security 7-pin, Pyramid High Security 7-pin, Pyramid Security
Key-in-Knob for G10 trim		CR2000-033H CR2010-033H CR2020-033H CR2027-033H	6-pin, horizontal tailpiece 6-pin, Security, horizontal tailpiece Pyramid High Security, horizontal tailpiece Pyramid Security, horizontal tailpiece
Interchangeable Core Optional for A6, N6, PR6 trim		CR8000 CR8000-7 CR8010 CR8020 CR8027	6-pin 7-pin 6-pin, Security 7-pin, Pyramid High Security 7-pin, Pyramid Security
Rim for all other trim		CR3000-200 CR3000-200-7 CR3010-200 CR3080-178 CR3080-178-7 CR3070-178 CR3070-178-7 CR3090-178 CR3020-200 CR3027-200 CR3030-178 CR3037-178 CR3050-178 CR3050-178-7 CR3040-178 CR3040-178-7	6-pin 7-pin, horizontal tailpiece 6-pin, horizontal tailpiece, Security 6-pin, LFIC 7-pin, LFIC 6-pin, LFIC less core 7-pin, LFIC less core 6-pin, Security LFIC Pyramid High Security Pyramid Security 7-pin Pyramid, LFIC High Security Pyramid Security LFIC 6-pin, SFIC 7-pin, SFIC 6-pin, SFIC, Less Core 7-pin, SFIC, Less Core
CR900 Series Key Removable Mullion Mortise Cylinders		CR1000-118-A62 CR1000-114-A62-7 CR1080-114-A62 CR1080-112-A62-7 CR1070-114-A62 CR1070-112-A62-7 CR1020-114-A62 CR1027-114-A62 CR1030-114-A62 CR1037-114-A62 CR1010-118-A62 CR1090-114-A62 CR1050-114-A62 CR1050-114-A62-7 CR1040-114-A62 CR1040-114-A62-7	6-Pin 7-Pin 6-Pin, LFIC 7-Pin, LFIC 6-pin, LFIC, less core 7-pin, LFIC, less core 7-pin, Pyramid High Security 7-pin, Pyramid Security 7-pin, Pyramid High Security LFIC 7-pin, Pyramid Security LFIC Security Security LFIC 6-pin, SFIC 7-pin, SFIC 6-pin, SFIC, Less Core 7-pin, SFIC, Less Core

CR900 Series Key Removable Mullion Cylinder Collar Packet

Mullion Series	Cylinder Length and Type			
	1-1/8"	1-1/4"	1-1/4" IC	1-1/2" IC
CR972BKM	610F01*	447F43*		609F37*
CR910BKM				

Note: Cylinder collar packets contain a collar and spring washer.

*Specify finish when ordering packets.

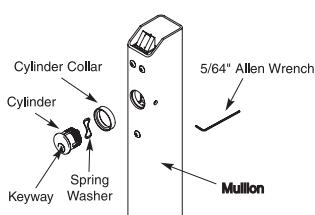

Experience a safer
and more open world

Copyright © 2002-2023, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited. Patent pending and/or patent www.assabloydss.com/patents.

Cylinders/Mullions

ED8000 Series

Compatibility with Competitive Cylinders (N6 and PR6 trims only)

Competitive Cylinder	Complete Trim	Tailpiece for Optional Cylinders
Schlage® conventional 21-002, 23-001 or 23-013	Specify M06	682F39-8 Tailpiece
Schlage Primus 20-548, 20-550, 20-748 or 20-750	Specify M06	682F39-8 Tailpiece
Best® style core, 6 or 7-pin	Specify M08	682F958 Tailpiece
Sargent® 13-3266	Specify M09	682F96-9 Tailpiece kit and Special Lever
Schlage IC Core	Specify M69	697F94-2 Tailpiece
IC 6-Pin	Specify C6	682F918 Tailpiece kit
IC 7-Pin	Specify C7	682F918 Tailpiece kit

For Assa and Medeco retrofit cylinders, consult those manufacturers' catalogs.

CR900 Series Removable Mullions

The CR900 series mullions are used to install two ED8200 Rim Exit Devices in a double door opening. They may be quickly and easily removed, then reinstalled, when a full double door opening is temporarily required. The CR900 series mullions meet ANSI A156.3, Type 22.

Materials and Finish

Steel mullion with malleable iron top and bottom plates; furnished with zinc plated fasteners for metal frames and concrete floors. May be cut, drilled and tapped in the field for Rim Exit Devices. CR900 series mullions are primed for painting, BHMA 600, red.

CR900 Series Mullions - How to Order

Removable Mullions

UL Fire Rating ¹	Mullion Opening Height ²	Catalog Number
Panic Only	Up to 7'2"	CR972
3-Hour	Up to 7'2"	CR972A
3-Hour (Only fire rated up to 8')	Up to 10'0"	CR910A ^{3,4}


Key Removable Mullions

UL Fire Rating ¹	Mullion Opening Height ²	Catalog Number
1-1/2 Hour	Up to 7'2"	CR972BKM ³
1-1/2 Hour (Only fire rated up to 8')	Up to 10'0"	CR910BKM ³

Notes:

1. UL label on mullion indicates listing.
2. May be field cut for doors.
3. Cylinder and collars not included, specify separately. See Cylinders on page 12.
4. For 8' length Mullion must be ordered as CR910A option and cut in the field to 8' size.

CR900 Mullion

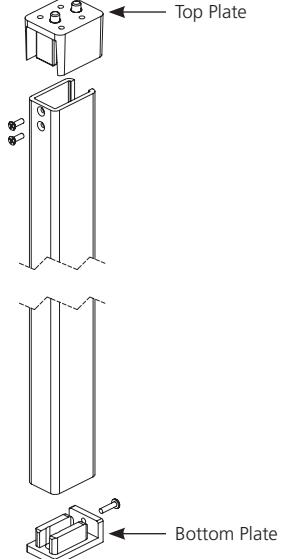

CR900 Series Mullions - Options

M95- Spacer Block

Recommended for double rabbeted frames where the stop face width is less than the mounting hole spacing and also for door frames 5-3/4" (176mm) or less. To order with a mullion, specify M95. To order separately, specify Part No. 683F29-8.

M96- Angle Bracket

Recommended for any header configuration with less than 3" (76mm) of mounting surface. To order with a mullion, specify M96. To order separately, specify Part No. 655F63-8.

M57- Mullion Stabilizer Kit

Controls the movement of the mullion. Recommended for opening over 7' high, or whenever door movement must be minimized. To order with mullion, specify M57. To order separately, specify Part No. 653F11-1 x 695 or 628.

How to Order

ED8000 Series

Ordering Examples

Rim Exit Device

Quantity	Exit Device	Finish
20	ED8200	689

Removable Mullion

Quantity	Mullion
6	CR908A

Where to find ordering information and Quick Codes

Functions and Trims	Pages 8-10
Rim and Vertical Rod	Pages 13
Removable Mullion	Page 15
Finish	Page 15
Handing	Page 15
Cylinders and Keying	Page 15
Door Thickness	Page 16
Strike	Page 16
Door Width	Page 16
Door Height	Page 16
Miscellaneous Options	Page 16

Rim Exit Device with Trim

Quantity	Exit Device	Trim/Function	Finish		Hand	Door Thickness	Door Width	Misc. Options
			Trim	Device				
65	ED8200A	A610ET	613ET	690	LHR	D200	W048	M58

Vertical Rod Exit Device with Trim


Quantity	Exit Device	Trim/Function	Finish		Hand	Door Thickness	Optional Strike	Door Width	Door Height	Misc. Options
			Trim	Device						
28	ED8400	N655ET	626ET	689	RHR	D214	S03	W048	H1000	M54

Contract/Detailed Order - Rim Exit Device with Trim


Quantity	Exit Device	Trim/Function	Finish		Hand	Door Thickness	Door Width	Misc. Options	Cylinder/Key Options	Keying	Keyset
			Trim	Device							
32	ED8200	P857ET	626ET	689	LHR	D200	W048	M54	C6	VKC3	AA1

Handing

LHR

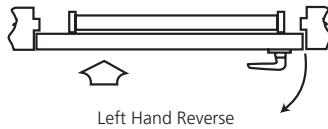

RHR

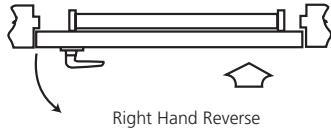

Note: Arrow (↖) indicates secure side of door.

Quick Codes

ED8000 Series

Cylinders and Keying

Description	Specify
Conventional 6-pin	6P
Conventional 7-pin	7P
LFIC	
LFIC 6-pin ³	C6
LFIC 6-pin, Less Core ³	CL6
LFIC 6-pin with Temporary Construction Core (Red) ³	CT6R
LFIC 6-pin with Temporary Construction Core (Blue) ³	CT6B
LFIC 6-pin with Temporary Construction Core (Green) ³	CT6G
LFIC 6-pin with Temporary Disposable Core ³	CT6D
LFIC 7-pin ³	C7
LFIC 7-pin, Less Core ³	CL7
LFIC 7-pin with Temporary Construction Core (Red) ³	CT7R
LFIC 7-pin with Temporary Construction Core (Blue) ³	CT7B
LFIC 7-pin with Temporary Construction Core (Green) ³	CT7G
LFIC 7-pin with Temporary Disposable Core ³	CT7D
SFIC	
SFIC 6-pin	C6S
SFIC 6-pin with Temporary Construction Core (Blue) ³	CT6SB
SFIC 6-pin Less Core	CLS6
SFIC 6-pin with SFIC Disposable Temporary Core ³	CT6SD
SFIC 7-pin	C7S
SFIC 7-pin with Temporary Construction Core (Blue)	CT7SB
SFIC 7-pin, Less Core	CLS7
SFIC 7-pin with SFIC Disposable Temporary Core	CT7S
Security	
Security	HS
Security LFIC ³	CHS
Access 3®	
Access 3® - Patented	AP
Access 3® - Security	AS
Access 3® - High Security	AHS
Access 3® LFIC - Patented ³	ACP
Access 3® LFIC - Security ³	ACS
Access 3® LFIC- High Security ³	ACHS
Pyramid	
Pyramid Security Fixed Core	PS
Pyramid Security LFIC	PCS
Pyramid High Security Fixed Core	PHS
Pyramid High Security LFIC	PCHS
Pyramid LFIC with Temporary Construction Core	CTP
Pyramid LFIC with Temporary Disposable Core	CTPD
Pyramid LFIC Less Core	CLP
Keying and Keys	
0-bitted with 2 blank keys	(standard)
Keyed Random	KR
Construction Master Keyed ¹	CMK
Master Keyed (all cylinders except (8000, 8020, 8027, 8200)	specify keyset
Master Keyed Pyramid	specify keyset
Master Keyed Security (including LFIC cylinder and core)	specify keyset
Master Keyed 8000, 8020, 8027, 8200	specify keyset
Master Keyed to customer bittings or sample key	specify keyset

Cylinders and Keying (cont.)

Description	Specify
Visual key control (VVC)	
No bitting or keyset stamping on keys	VVK0
Keys only	VVK1
Cylinders and Keys ² (not for AS, AHS, ACS, ACHS, HS, CHS, PHS or PCHS)	VVK2
Cylinders Only ² (not for AS, AHS, ACS, ACHS, HS, CHS, PHS or PCHS)	VVK3
Concealed key control (CKC)	
CKC Cylinders with VVC Keys	CKC2
CKC Cylinders Only ² (not for AS, AHS, ACS, ACHS, PHS, PCHS)	CKC3

Notes:

1. CMK construction master keying is not available in Pyramid or Security Series.
2. VKC2, VKC3, CKC3 are not available in Pyramid or Security series.
3. Not available for G10 trim.

Handing

Hand	Specify
Right Hand Reverse	RHR
Left Hand Reverse	LHR

Finishes

Description	Specify
US3 Bright Brass	605
US4 Satin Brass	606
US9 Bright Bronze	611
US10 Satin Bronze	612
US10B Dark Oxidized Satin Bronze, oil rubbed	613
US14 Bright Nickel Plated	618
US15 Satin Nickel Plated	619
US19 Flat Black Coated	622
US26 Bright Chromium Plated	625
US26D Satin Chromium Plated	626
Satin Chromium Plated with MicroShield®*	626C
Silver Aluminum Painted	689
Dark Bronze Painted	690
Light Bronze Painted	691
Black oxidized bronze,oil rubbed	722
Black Suede Powder Coat	BSP

*G10, A6, N6 & PR6 trims are available with MicroShield®.

Note: see pages 4 and 6 for finish availability for device and trim.

Lock/Cylinder Finish

Lock	Cylinder/Core*
605,606,611,612,613,690,691,722	606
618,619,622, 625,626,626C,689,WSP	626
BSP	BSP

*Finish when cylinder provided with lock

Quick Codes

ED8000 Series

Door Thickness

Door	Specify
1-3/8" (35mm)*	D138
1-3/4" (44mm)	(standard)
2" (51mm)	D200
2-1/4" (57mm)	D214

*G10, A6, N6, PR6 series trims only.

Door Width

Door	Specify
30" (762mm)	W030
36" (914mm)	(standard)
42" (1067mm)	W042
48" (1219mm)	W048

Door Height

Door	Specify
7'6" (2.29m) (ED8400 devices)	(standard)
8'0" (2.44m) (ED8400A devices)	(standard)
10'0" (3.05m) (ED8400 devices only)	H1000

Strike

Description	Specify
Rim	
Rim x vertical rod	S02
Vertical Rod	
Flush bottom (ED8400 devices only)	S03

Miscellaneous Options

Description	Specify
Less cylinder, with tailpiece for Schlage® cylinder	M06
Lever to accept Best® type core (N6 and PR6 trims only)	M08
Lever to accept Sargent® cylinder (N6 and PR6 trims only)	M09
Lever to accept <i>Schlage</i> IC core	M69
Knurling outside only (trim side)	M21 ²
Abrasive coat outside and inside (trim and device)	M23
Abrasive coat inside only (device side)	M24
Abrasive coat outside only (trim side)	M25
Less dogging	M51
Sex nuts and bolts (SNBs) ¹	M54
Mullion stabilizer kit	M57
Shim kit (for vision light)	M58
Shim for 2-3/4" (70mm) backset on doors with 1/2" (13mm) stop (rim devices only)	M59

1. Not available with D138 option.

2. All levers provided in a powder coat finish will be supplied with an abrasive coating

Helpful Terms

ED8000 Series

Abrasive Coat

Hard granular material applied to provide a non-slip tactile surface for the visually impaired.

Active Door

In a pair of doors, the door that is operable from the trim side.

Astragal

A vertical member applied to one or both sides of a pair of doors at the meeting edges. The astragal closes the gap between the two doors.

Coordinator

A device used on a pair of doors to ensure that the inactive door closes before the active door.

Deadlocking Latch

A supplemental latch that automatically deadlocks the latchbolt when pressure is applied to it.

Dogging

A mechanism that allows the latchbolt to remain retracted, permitting the door to operate as if it were a push-pull; it cannot be used on fire-rated exit devices.

Double Egress

A pair of doors of the same hand that swing in opposite directions, commonly found in corridors.

Dummy Trim

Trim only. Usually used on the inactive door of a pair of doors for design balance.

Exit Device (Panic Hardware)

A door locking device with a pushpad or crossbar which, when pressed, allows instant exit (egress).

Fire Exit Hardware

An exit device listed by an independent testing laboratory as meeting panic, fire and hose stream test standards; used on fire-rated openings.

Hand

The direction a door swings.

Inactive Door

In a pair of doors, the door that is inoperable from the trim side.

Latchbolt

A lock component that has a beveled end and projects into a strike, holding the door in a closed position.

Mullion

A fixed or removable vertical member that divides a door opening and provides a latch surface for a pair of rim exit devices.

Narrow Stile Door

Usually a door having a stile less than 2-3/4" (70mm) wide, commonly seen on aluminum or glass front applications.

Shim Kit

Pieces of metal that permit mounting of an exit device on a door that has a surface projecting vision light (glass bead) moulding.

Split Astragal

An astragal that is split through the middle on a pair of doors, allowing both doors to operate independently.

Threshold

A strip fastened to the floor beneath a door. It serves as a stop, prevents heat loss, and provides a strike location for latching the bottom rod of a vertical rod exit device.

Trim

A knob, lever, pull, or thumbpiece used on the outside of an exit device door to control access to an area.

Universal Exit Device

An exit device that may be used on doors of either hand without any modifications.

Keying and Cylinder Terms

Concealed Key Control (CKC)

The marking of standard key symbols on a cylinder in a location which is not visible once the cylinder installed.

How to Specify

ED8000 Series

Suggested Specification

All exit devices shall be ED8000 Series Pushpad Exit Devices as manufactured by Corbin Russwin Architectural Hardware.

The maximum exit device projection shall be 2-1/2" (64mm). The exit device bar shall be constructed of heavy wrought steel. The pushpad shall be constructed of wrought steel; scalped pushpads or pushpads with plastic or Lexan coatings shall not be acceptable. The pushpad shall cover the entire length of the devices. Pushpads which cover less than the entire length of the device shall not be acceptable. Nylon bearings and stainless steel springs shall be used for long life and durability; only torsion springs are acceptable. All device covers shall be of aluminum; plastic or metal stamping shall not be acceptable. Mounting screws shall be concealed to deter tampering. All ferrous parts shall be zinc coated to prevent rusting.

Single point, one quarter turn hex key dogging shall be standard on non-fire-rated devices.

All devices shall be listed by Underwriters Laboratories for safety as panic hardware. Fire rated devices shall be UL/C-UL listed for A label and lesser class doors, 4' x 8' single and 8' x 8' pair. The model number shall be located on the end cap; devices having the model number located other than on the end cap shall not be acceptable.

On trims with cylinders, the locking and unlocking of the trim shall be housed in the trim and not in the active head of the device. Trim shall be throughbolted and fasteners shall be concealed.

All trims shall be furnished in architectural finishes and shall match the trims and finishes on corresponding locksets.

Certification:

ANSI A156.3, Grade 1

All devices, trims and cylinders shall be from one manufacturer.

All devices and trims shall carry a one-year limited warranty.

The ASSA ABLOY Group is the global leader in access solutions. Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window hardware, mechanical and smart locks, access control and service.



ASSA ABLOY

For additional information, contact your
ASSA ABLOY Door Security Solutions
sales consultant or visit www.corbinrusswin.com.

In U.S.

Corbin Russwin
Architectural Hardware
225 Episcopal Road
Berlin, CT 06037
Phone: 800-543-3658
Fax: 800-447-6714
corbinrusswin.com

In Canada

ASSA ABLOY Door
Security Solutions Canada
160 Four Valley Drive
Vaughan, Ontario
Canada L4K 4T9
Phone: 800-461-3007
Fax: 800-461-8989
www.assaabloydss.ca

MicroShield®

As part of their promise to provide innovative solutions to their customers, certain ASSA ABLOY Group brands offer the MicroShield® technology, a silver-based antimicrobial coating designed to inhibit the growth of bacteria.

Microshield® is a registered trademark of ASSA ABLOY Access and Egress Hardware Group, Inc.



The Agion antimicrobial is not intended as a substitute for good hygiene. Coated products must still be cleaned to ensure the surfaces will be free of destructive microbes. ASSA ABLOY makes no representations or warranties, express or implied, as to the efficacy of the Agion antimicrobial. A copy of the Agion warranty is available upon request. Agion is a registered trademark of Agion Technologies, Inc., Wakefield, MA, USA