


Mounting details

Stop Face (Push Side)
Mounting

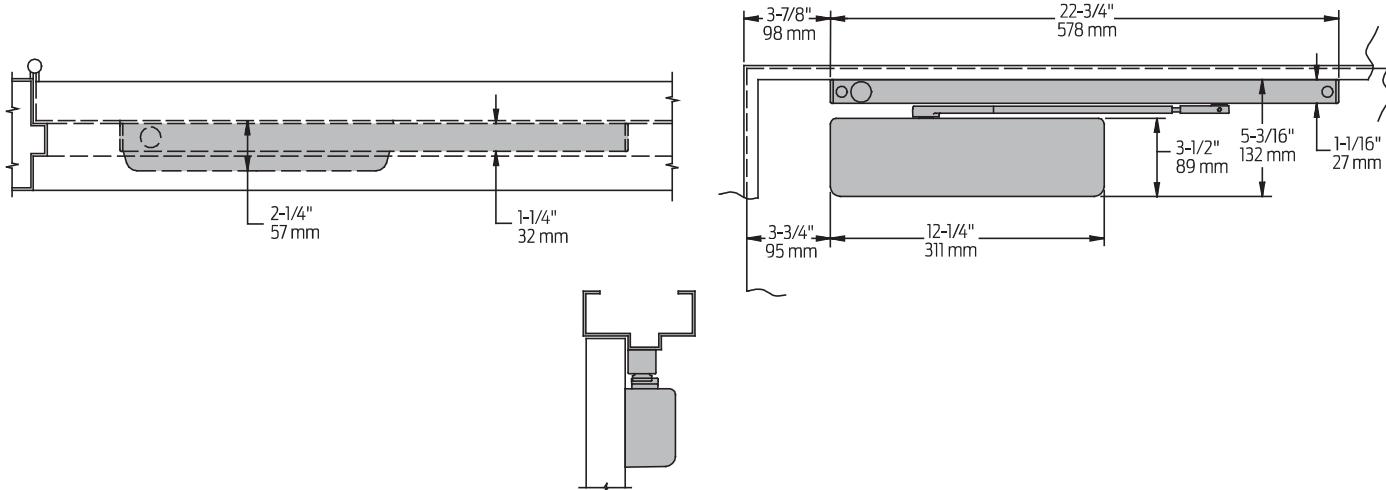

Butt Hinges	Should not exceed 5" (127 mm) in width
Auxiliary Stop	Recommended at hold-open point
Top Rail	<ul style="list-style-type: none"> ■ Minimum 5-3/4" (146 mm) ■ Installation with PLATE, 4040SE-18PA requires SPECIAL TEMPLATE and 2" (51 mm) minimum top rail
Stop Width	1-1/4" (32 mm) minimum
Door Width	<ul style="list-style-type: none"> ■ 2' 4" (711 mm) minimum for single door with SE ■ 4' 8" (1422 mm) minimum for paired doors with SE
Maximum Opening	<ul style="list-style-type: none"> ■ Templating allows 110° ■ Hold-open points between 85° and 110° in approximately 3° increments ■ SEL track provides hold-open points between 90° and 120°, in approximately 3° increments
SE, SEL Electrical Options	<ul style="list-style-type: none"> ■ These track assemblies require a single power circuit for the holding solenoid ■ SE or SEL holding solenoid is either 24V or 120V input, please specify ■ An optional 4040SE-3210 or 8310-824 TRANSFORMER reduces 120V AC line voltage to 24V AC ■ Circuitry accepts either AC or DC input
Options	<ul style="list-style-type: none"> ■ Long (SEL) track
SE Wiring Diagram	

Notes:

- Information applies to 4040 SE closers unless otherwise specified
- Momentary on/off switch board assembly for testing door release also provides over-voltage protection. Field replaceable
- Functions as a full rack and pinion closer when hold-open is not engaged or current is interrupted