



INSTRUCTION FOR REPLACEMENT OF HOTEL (# 66) FUNCTION CYLINDER ASSEMBLY

(# 66)

*USE A PIN TO DEPRESS INSIDE
KNOB CATCH
*PULL OUT INSIDE KNOB

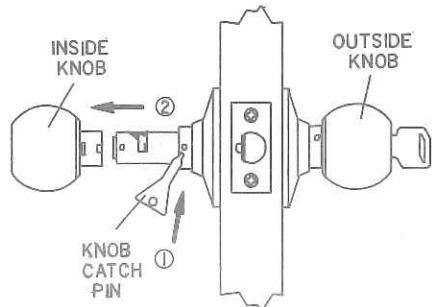


*USE A PIN TO PUSH OUT INSIDE BUTTON
*TURN OUTSIDE KNOB CLOCKWISELY 45° UNTIL KNOB CATCH IS
VISIBLE UNDER HOLE ON COLLAR
*TURN KEY COUNTERCLOCKWISELY TO THE END
*DEPRESS KNOB CATCH AND PULL OUT OUTSIDE KNOB

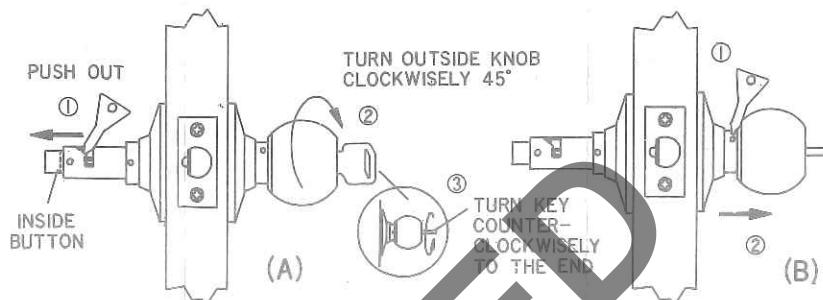

*AFTER REPLACING CYLINDER ASSEMBLY,
INSTALL OUTSIDE KNOB ACCORDING TO
INSTALLATION INSTRUCTION FOR ENTRANCE
LOCK

*PUSH DOWN INSIDE BUTTON

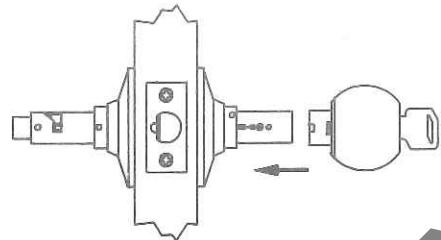

*INSTALL INSIDE KNOB

