


The 4410ME SENTRONIC® is a heavy duty, electrically controlled closer/holder designed to provide infinitely adjustable hold-open for fire and smoke barrier doors. Door is held open until current interruption releases mechanism and the door closes. Double lever arm closer is specifically designed for interior doors. Choice of finishes, cylinder functions, and installation accessories meet virtually all life safety requirements.

Certifications	Grade 1- ANSI A156.15, UL 10C, 100 Hour Salt Spray, Meets BAA - Buy American Act, NFPA 101	Cover	Metal, Standard
Body Construction	<ul style="list-style-type: none"> ■ Cast iron Body ■ Full Complement Bearing ■ 1-1/2" Diameter Piston ■ 11/16" Diameter Double Heat Treated Pinion Journal 	Fasteners	Wood and machine screw pack
Fluid	All Weather Fluid	Mounting	Top jamb (Push Side)
Handing	Handed	Arms	Regular arm
Size	Sized, 4 only	Finishes/Colors/ Powder Coat	<ul style="list-style-type: none"> ■ Aluminum (689) ■ Statuary Bronze (690) ■ Light Bronze (691) ■ Black (693) ■ Dark Bronze (695) ■ Brass (696) ■ Custom colors optional
Warranty	2 years		<ul style="list-style-type: none"> ■ Optional SRI primer - powder coat only ■ Optional plated finishes
		Wiring	<ul style="list-style-type: none"> ■ Concealed or surface ■ Interfaces with fire alarm systems

**Special
Templates**

Customized installation templates or products may be available to solve unusual applications.
Contact LCN Product Support for assistance.

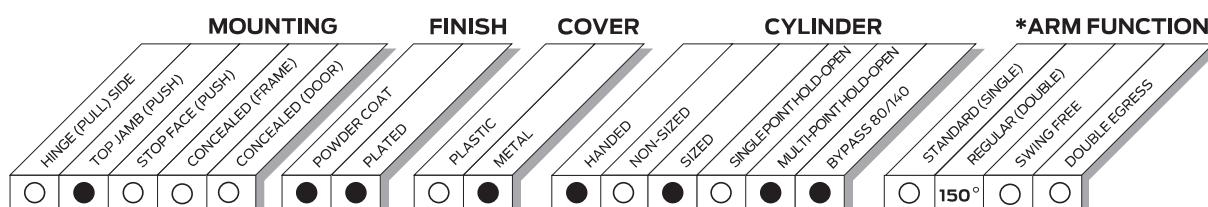

● AVAILABLE
○ NOT AVAILABLE

* Maximum opening/hold-open point with standard template. See individual closer series for degrees of opening per installation.