
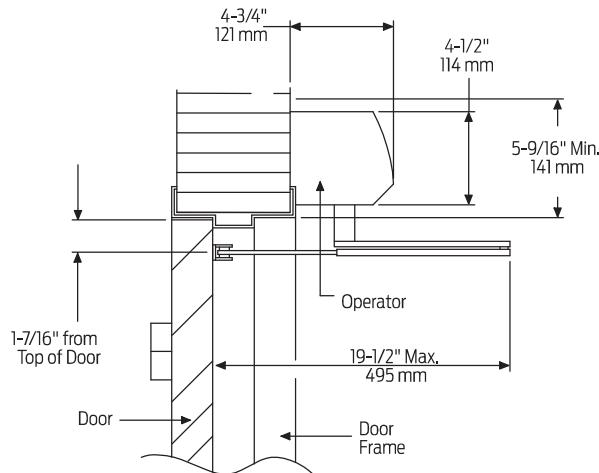




# 9140 Series Benchmark

## Mounting details

### Top Jamb Single Door Mounting

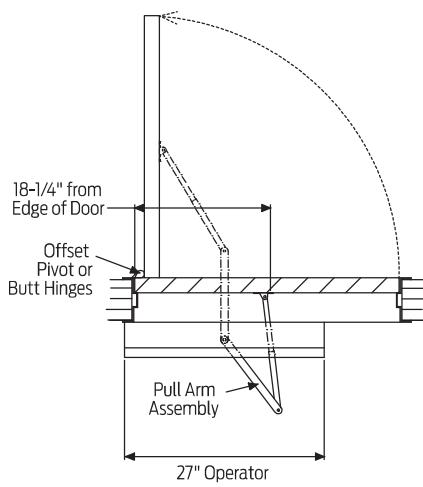

**Offset/butt hinge, center pivot, push, standard cover**

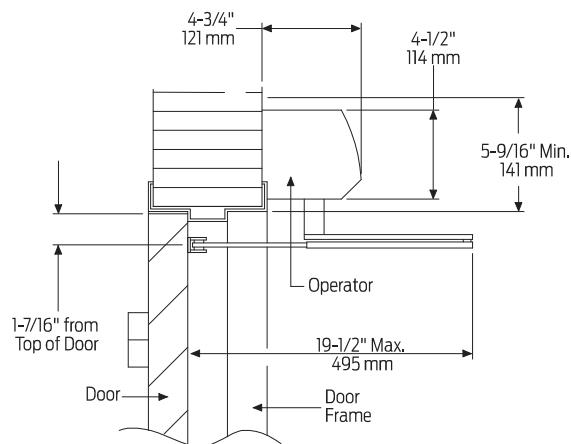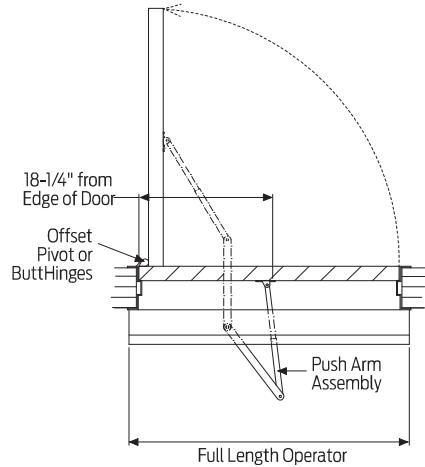

**Offset/butt hinge, center pivot, push, full cover**

<b>Butt Hinges</b>	Should not exceed 5" (127 mm) in width
<b>Reveal</b>	Push installations should not exceed 6" (152 mm) for REGULAR ARM and 9-3/4" (248 mm) for LONG ARM
<b>Head Frame</b>	Minimum 2" (51 mm)
<b>Top Rail</b>	<ul style="list-style-type: none"> <li>■ Minimum 2" (51 mm)</li> <li>■ Flush ceiling installation requires 5-1/4" (133 mm) minimum</li> </ul>
<b>Opening and Closing Time</b>	<ul style="list-style-type: none"> <li>■ Variable by adjustments to the electronic control module located on the operator assembly</li> <li>■ Maximum hold open time adjustable up to approximately 30 seconds</li> </ul>
<b>System Diagram</b>	See "AUTOMATIC OPERATORS" section pages 54 for typical system wiring and page 55 for electrical data
<b>Maximum Opening</b>	Template allows 90 degree power opening and 90 degree manual opening

#### Notes:

- Push 'N Go permits non-switch activation with a microprocessor control box that ensures reliability and maintains customer settings
- Power boost allows for increased closing force near latch
- On/off switch is included as standard
- All potentiometers are clearly labeled with their functions
- LED lights indicate power to control box and motor gearbox