



NATIONAL GUARD
PRODUCTS

Smoke-Rated Astragal Seal Set 115N



Material

Aluminum alloy 6063, T5 temper


Synthetic rubber polymer

EPDM

- Very good abrasion resistance, tensile strength and memory
- Flame resistant
- Moisture resistant
- Temperature range -60°F to 250°F
- Good resistance to ozone, sunlight and aging
- BHMA Certified to ANSI/BHMA A156.22 performance tests for heat, cold, air infiltration and smoke infiltration
- Fire-rated Astragal Seals cannot replace any astragal required on the door by the door manufacturer to maintain its fire label
- IBC, NFPA 80, NFPA105, and NFPA 252 require the gap at the meeting edge between fire labeled doors must not exceed 1/8"
- #6 x 3/4" stainless steel sheet metal screws furnished
- Screw holes are slotted for adjustment
- Provided as two piece set

Finishes

115NA	Anodized Aluminum	Gray EPDM
115NB	Gold	Black EPDM
115NDKB	Dark Bronze	Black EPDM

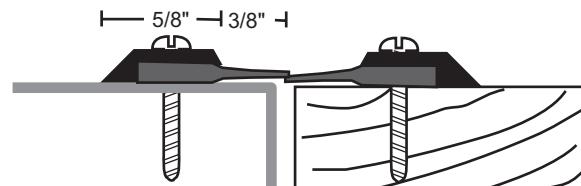

Project:

Submitted by:

Date:

Notes: