



5300LN Series

ANSI/BHMA Grade 2 Certified
Cylindrical Lever Locks





Table of Contents

CONTENTS

Benefits & Features	3
How to Order	4
Finishes	5
Lever Trim	6
Functions	7-9
Electrified Options	10
Electrified Accessories.....	11
Cylinders	12-13
Latchbolts	14
Strikes	15
Sample Specification.....	16
Technical Specifications & Listings	17

5300LN SERIES CYLINDRICAL LEVER LOCKS

The 5300LN Series Cylindrical Lever Lock is a reliable Grade 2 cylindrical lockset that boasts innovative design and construction features. The Free Wheeling lever mechanism helps to resist against vandalism, while the adjustable door thickness feature makes for easy installation. Protected by a five year warranty and a lifetime warranty against lever sag and spring breakage, you can rely on the 5300LN to withstand the rigors of everyday use.

With innovative features in an affordable lock, Yale Works for YouSM.



MicroShield®

As part of their promise to provide innovative solutions to their customers, certain ASSA ABLOY Group brands offer the MicroShield® technology, a silver-based antimicrobial coating designed to inhibit the growth of bacteria.

MicroShield® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company.




Benefits & Features

BENEFITS

- **Secure:** Designed to withstand everyday use and resist damage and vandalism
- **Versatile:** Variety of functions, trims, finishes and keying options for ultimate installation flexibility
- **Protected:** Five year mechanical warranty plus a lifetime warranty against lever sag and lever spring breakage
- **Strong & Reliable:** ANSI/BHMA Grade 2 certified for long life and durability

FEATURES

- Free Wheeling lever mechanism prevents vandalism and reduces lock maintenance
- Adjustable door thickness mechanism
- Heavy duty torsion spring prevents lever sag throughout product's lifetime
- Thrubolts solidly through the door, providing greater strength and stability
- Available with a wide range of cylinder options
- Available in 23 functions (including electrified), 12 standard finishes and 3 lever designs
- ADA compliant for ease of accessibility

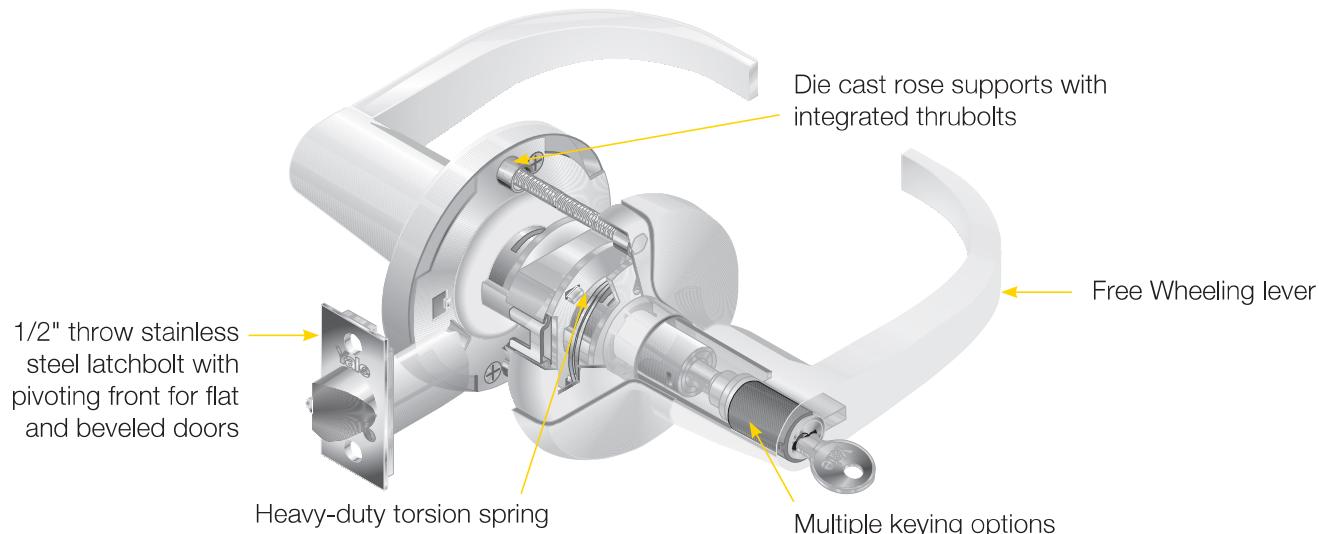

SPECIFICATIONS

Backset:	2-3/4" standard, 2-3/8" optional
Door Thickness:	Adjustable for doors 1-3/4" to 2"
Handing:	Non-handed, field reversible
Latchbolt:	2-3/4" backset, 1/2" throw. See page 14 for additional options.
Strike:	ANSI strike 4-7/8" x 1-1/4" x 1-1/4" lip to center. See page 15 for additional options.
ANSI/BHMA:	Certified Grade 2, ANSI/BHMA A156.2
UL/cUL:	Listed for 3 hour fire doors
Windstorm:	Certified, check local codes.
Warranty:	5 years

